



AMERICAN STANDARD SERIES

BETA-10CX

Recommended for professional audio vocal wedges, or mid-bass in a sealed enclosure. Also works well in a vented enclosure as a satellite or monitor.



The data for this coaxial woofer was calculated with the ASD:1001 driver screwed into the woofer, but not active.

SPECIFICATION

Nominal Basket Diameter	10.0", 254 mm
Nominal Impedance*	8 Ω
Power Rating**	
Watts	250 W
Music Program	500 W
Resonance	49 Hz
Usable Frequency Range	60 Hz – 4.0 kHz
Sensitivity***	94.3 dB
Magnet Weight	38 oz.
Gap Height	.312", 7.9 mm
Voice Coil Diameter	2.0", 51 mm

THIELE & SMALL PARAMETERS*

Fs	49 Hz
Re	5.48 Ω
Le	0.67 mH
Qms	6.16
Qes	0.41
Qts	0.38
Vas	2.16 cu.ft., 61.10 liters
Vd	172.5 cc
Cms	0.37 mm/N
BL	10.88 T-M
Mms	29 grams
EBP	120
Xmax	5.00 mm
Sd	344.9 cm ²
Xlim	7.6 mm

MOUNTING INFORMATION


Recommended Enclosure Volume	Sealed	14.16–42.48 liters, 0.50–1.50 cu.ft.
	Vented	15.29–87.78 liters, 0.54–3.10 cu.ft.
Driver Volume Displaced		0.041 cu.ft., 1.17 liters
Overall Diameter		10.08", 256.0 mm
Baffle Hole Diameter		9.18", 233.2 mm
Front Sealing Gasket		Yes
Rear Sealing Gasket		Yes
Mounting Holes Diameter		0.25", 6.4 mm
Mounting Holes B.C.D.		9.66", 245.4 mm
Depth		3.98", 101.1 mm
Net Weight		7.30 lbs , 3.31 kg
Shipping Weight		8.40 lbs , 3.81 kg

MATERIALS OF CONSTRUCTION

- Copper voice coil
- Kapton former
- Ferrite magnet
- Tapered Coax
- Pressed steel basket
- Paper cone
- Cloth cone edge
- Zurette dust cap



FREQUENCY RESPONSE & IMPEDANCE CURVE*

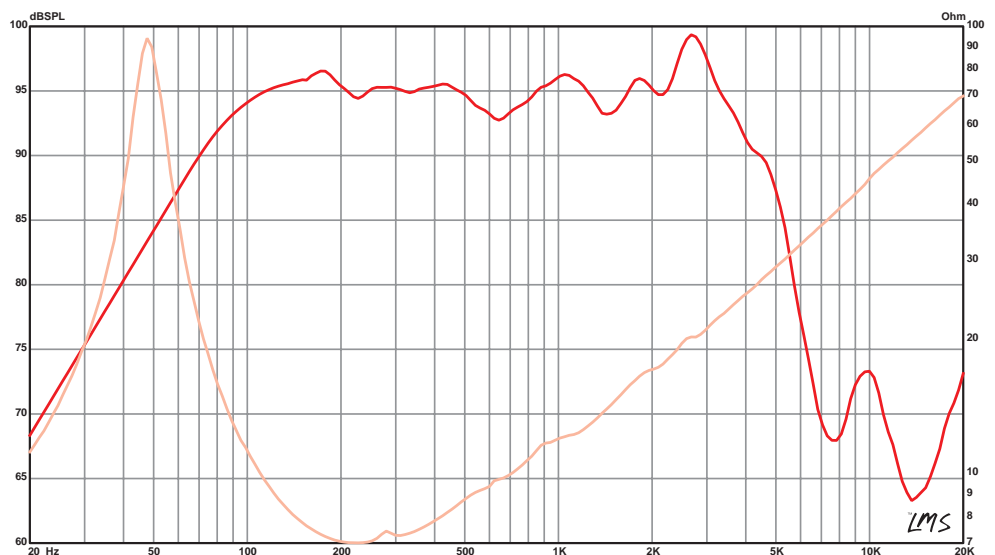

LEARN MORE AT EMINENCE.COM



From design and manufacturing to the stage or studio. Once you've experienced the performance of Eminence, you'll never accept anything else.

MISSION STATEMENT

Eminence is dedicated to providing the best Quality, Value and Service to meet our customers' needs.

FOOTNOTES

- * Please consult www.eminence.com for specifications of models with alternative impedances.
- ** Multiple units exceed published ratings evaluated under EIA 426A specification while tested in a free-air, non-temperature-controlled environment.
- *** The average output across the usable frequency range when applying 1W/1m into the nominal impedance. i.e: 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. x 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Carver PM-120 amplifier | 2700 cu. ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).
- **** BETA 8CX, 10CX, and 12CX are coaxial speakers with tweeter sold separately. Published usable frequency response contingent upon use of ASD:1001 HF Driver.
- ***** Multiple units exceeded published ratings evaluated under EIA-426A or AES specification while mounted on Eminence's H290, H290S, or H2EA horn in a non-temperature-controlled environment.
- *****The average on axis output across the entire usable frequency range when applying 1W/1m into the nominal impedance, i.e. 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft x 2ft baffle is built into the wall with horn front mounted | Carver PM-120 amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).

Prices, specifications and product cosmetics are subject to change without notice.

EMINENCE SPEAKER LLC

838 Mulberry Pike, Eminence, KY 40019



Follow us:

EMINENCE.COM

