

TRAVIS TOY SIGNATURE

DOUBLE-T 15

With the Travis Toy signature Double-T 15 you get the benefit of more air movement from a larger 15" surface area, but with the punch and cut of a 12". This 4 ohm speaker is a direct drop-in replacement for all of the most common and beloved 15" steel guitar combo amps available.

15" | 300 WATTS
4 Ω



"The new Double-T 15 is everything I've always wanted a 15" speaker to be. The main reason I moved away from 15" speakers was the lack of "punch" that they typically have in comparison to a great 12" speaker. I feel it's a marriage of all of my favorite characteristics from both 12" and 15" speaker sizes." – Travis Toy / Session Artist / Touring Professional

SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	4 Ω
Power Rating*	300 W
Resonance (Fs)	56.5 Hz
Usable Frequency Range	80 Hz – 3.8 kHz
Sensitivity*	101 dB
DC Resistance (Re)	3.2 Ω
Qts	0.33
Magnet Weight	11 oz.
Gap Height	0.36", 9.1 mm
Voice Coil Diameter	3.0", 76.2 mm


MOUNTING INFORMATION

Enclosure Type	Closed Back
Open Back	Acceptable
Driver Volume Displaced	0.09 cu.ft., 2.54 liters
Overall Diameter	15.32", 389.1 mm
Baffle Hole Diameter	14.0", 355.6 mm
Depth	6.63", 168.28 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.28", 7.1 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Net Weight	7.7 lbs, 3.5 kg
Shipping Weight	9.9 lbs, 4.49 kg

MATERIALS OF CONSTRUCTION

Edge wound copper voice coil
Polyimide former
Neodymium magnet
Vented core
Cast aluminum basket
Paper cone
Cloth cone edge
Paper dust cap

FREQUENCY RESPONSE & IMPEDANCE CURVE*

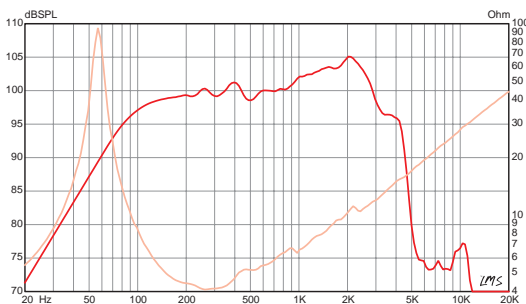

VISIT EMINENCE.COM TO FIND A DEALER NEAR YOU.

* See footnotes on page 2 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.



From design and manufacturing to the stage or studio. Once you've experienced the performance of Eminence, you'll never accept anything else.

MISSION STATEMENT

Eminence is dedicated to providing the best Quality, Value and Service to meet our customers' needs.

FOOTNOTES

- * Please consult www.eminence.com for specifications of models with alternative impedances.
- ** Multiple units exceed published ratings evaluated under EIA 426A specification while tested in a free-air, non-temperature-controlled environment.
- *** The average output across the usable frequency range when applying 1W/1m into the nominal impedance. i.e: 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. x 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Carver PM-120 amplifier | 2700 cu. ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).
- **** BETA 8CX, 10CX, and 12CX are coaxial speakers with tweeter sold separately. Published usable frequency response contingent upon use of ASD:1001 HF Driver.
- ***** Multiple units exceeded published ratings evaluated under EIA-426A or AES specification while mounted on Eminence's H290, H290S, or H2EA horn in a non-temperature-controlled environment.
- *****The average on axis output across the entire usable frequency range when applying 1W/1m into the nominal impedance, i.e. 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft x 2ft baffle is built into the wall with horn front mounted | Carver PM-120 amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).

Prices, specifications and product cosmetics are subject to change without notice.

EMINENCE SPEAKER LLC

838 Mulberry Pike, Eminence, KY 40019



Follow us:

EMINENCE.COM

