



1TD2-8 **1" DESIGNER** **DOM TWEETER** **8 OHM**


FEATURES

- Fabric dome with 1" voice coil
- Round injection-molded faceplate
- Smooth, detailed sound quality
- Great-looking replacement for classic dome tweeters


PARAMETERS

Impedance	8 ohms
Re	7.32 ohms
Le	0.25 mH
Fs	2,531 Hz
Qms	-
Qes	-
Qts	-
Mms	-
Cms	-
Sd	-
Vd	-
BL	-
Vas	-
Xmax	-
VC Diameter	25 mm
SPL	90dB @ 2.83V/1m
RMS Power Handling (AES 426B)	50 watts
Usable Frequency Range (Hz)	2,100 - 20,000 Hz


MECHANICAL DRAWING

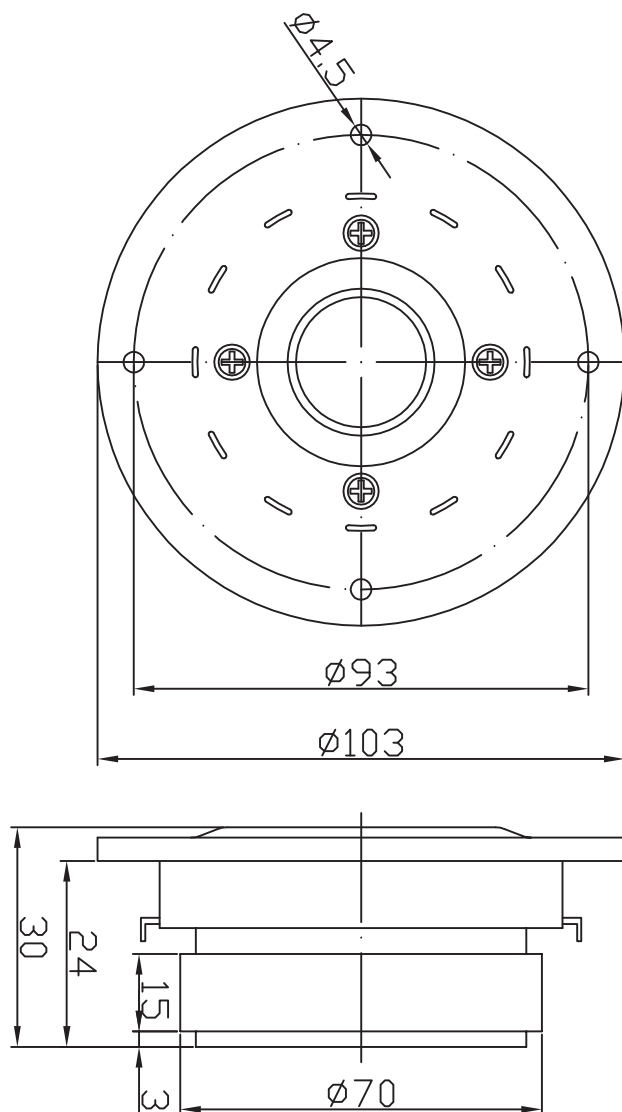

IMPEDANCE/PHASE

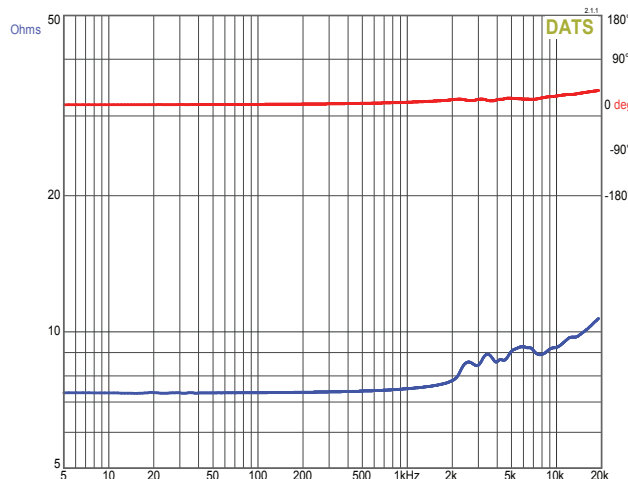

FREQUENCY RESPONSE

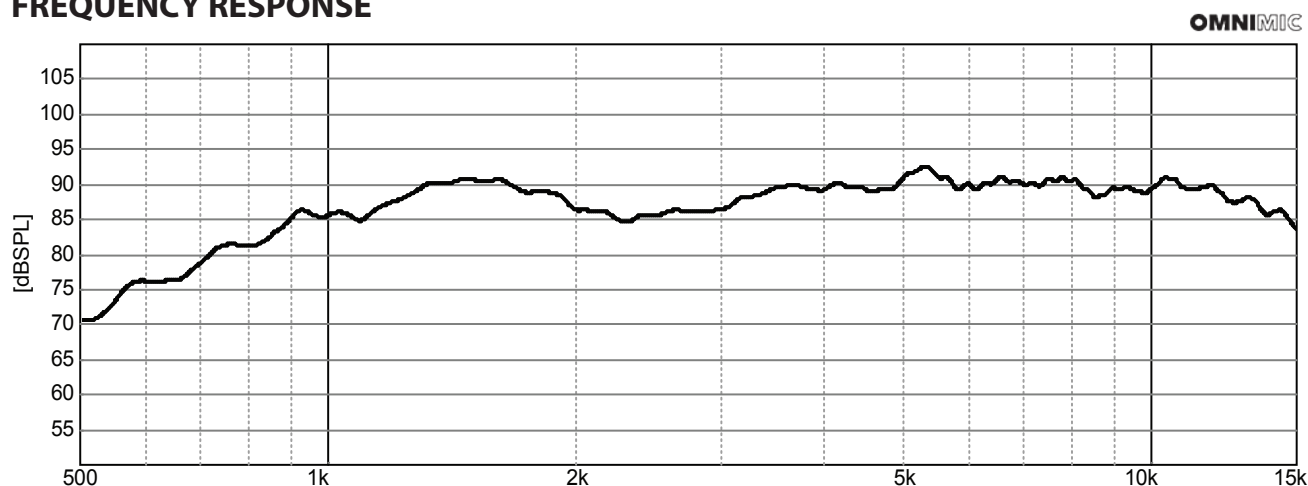

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.