

OWNER'S MANUAL



EXL-SQ6.5C

6.5" 2 WAY PACKAGED COMPONENT SET


EXL PACKAGED COMPONENT SET

Please read the entire instruction manual before using the product and save it for future reference.

We reserve the right for any errors in text or images and any necessary changes made to technical data. If you have any questions regarding technical problems please contact Customer Services.

SPECIFICATIONS	EXL-SQ6.5C
SPEAKER DESIGN	2 WAY
WOOFER	6.5"
MID	N/A
TWEETER	Ф38mm
RATED IMPEDANCE	4ohm
RMS POWER	120W
MAX POWER	400W
SENSITIVITY	86dB/w/m
FREQUENCY	45∼22000Hz
MOUNTING HOLE DIA	Ф4.5±0.1mm
TOP MOUNT DEPTH (NO GRILL)	75mm
TOP MOUNT DEPTH (INCLUDE GRILL)	98mm
BOTTOM MOUNT DEPTH	65mm
TWEETER PROTRUSION	16mm
GRILLES	YES
TWEETER MAGNET MATERIAL	NdFeB
TWEETER DOME MATERIAL	Tetoron dome tweeter
TWEETER DESIGN	1 WAY
WOOFER CONE MATERIAL	black waterprood paper cone (with wool)
WOOFER SURROUND MATERIAL	Bright PU edge

INSTALLATION

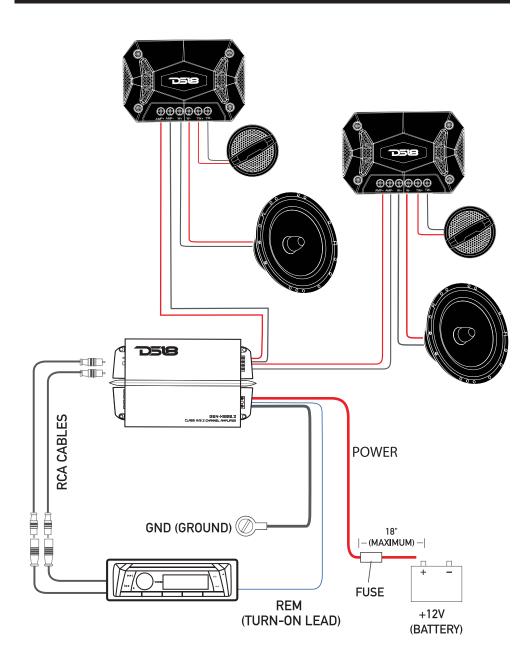

EXL-SQ6.5C



EXTREMELY LOUD

WWW.DSIB.COM #WELIKEITLOUD







