





NITRILE DIPPED



GL605

Polyester | Nitrile | Sandy + Smooth

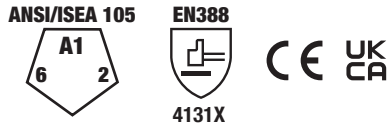

ANSI/ISEA 105 – CUT A1 | ABRASION 6 | PUNCTURE 2
 EN388 – ABRASION 4 | CUT 1 | TEAR 3 | PUNCTURE 1 | CUT TDM-100 X

Double dipped sandy nitrile coating on the palm and fingers provides an effective grip in dry and oily situations // Smooth nitrile full dipped coating keeps hands dry in wet applications // 15 gauge outer polyester cut-resistant liner provides comfort and durability // 10 gauge inner acrylic cut-resistant liner delivers insulation and moisture resistance // Knit cuff creates a snug fit to keep out debris

Suggested Applications

Aerospace // Assembly // Construction // Fisheries // Handling Oily Parts // HVAC // Manufacturing // Utilities

Glove Breakdown

Type: Dipped Glove
Material: Sandy + Smooth Nitrile
Outer Liner: 15 Gauge Polyester
Cuff: Polyester + Latex Elastic

This product contains components that may be a potential risk to allergic reactions (latex in the wrist cuff). Do not use in the event of hypersensitivity signs or a known allergy to latex.

Packaging

	Outer Polybag	Case
GL605	12 Pair	120 Pair
Made in China		

Product markings may vary // Updated as of 06.23



Glove Sizing

Small 7	Medium 8	Large 9	X-Large 10	2X-Large 11
------------	-------------	------------	---------------	----------------

All sizes comply with EN ISO 21420 for comfort, fit and dexterity. Only wear the correct size for your hand. Gloves that are too loose or too tight will restrict movement and will not provide the optimal level of protection.