



Welcome to Bath Controls by Gecko

Efficient and reliable electronic controls for whirlpools and therapeutic baths

[Français](#) | [English](#)



[Bath](#) › [Controls](#) › [Blower](#) › [Pumps](#) › [Heater](#) › [Accessories](#) › [Support](#) › [Contact us](#)

Search



litestreme series
digital controls for whirlpools



[Overview](#) | [Main Features](#)

Affordable electronics for any whirlpool?

Gecko Litstreme Series feature economical and compact controls designed for whirlpools equipped with water pump only. With controls this affordable, why go without?!!



End-users will appreciate Litestreme for its practical functionality. Control switch turns on and off easily with the touch of a finger and lights up to show when pump is running. A built-in timer turns pump off after 20 minutes unless you turn it off first.



Litestreme controls can also be equipped with optional water level sensor. Discrete and compact, Litestreme power box fits in anywhere, and is very to install. Gecko can customize models to specific requirements creating unique, exclusive packages.



Gecko Alliance

450 des Canetons, Québec (QC) G2E 5W6 Canada, 800.78.GECKO, Fax: 418.872.0920
9225 Stellar Court, Corona, CA 92883 USA, 951.667.2000, Fax: 951.667.2902

© 2009 - Gecko Alliance



Welcome to Bath Controls by Gecko


Efficient and reliable electronic controls for whirlpools and therapeutic baths

[Français](#) | [English](#)



[Bath](#) › [Controls](#) › [Blower](#) › [Pumps](#) › [Heater](#) › [Accessories](#) › [Support](#) › [Contact us](#)

Overview | **Main Features**

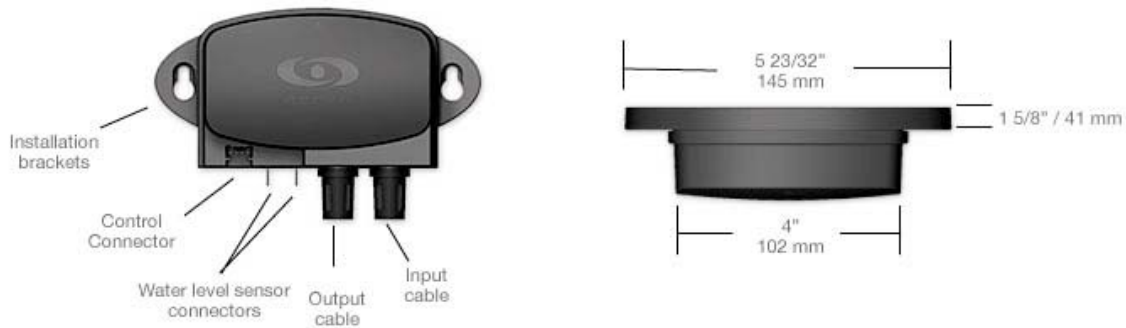

Standard features include:

- Discrete and compact power box fits in anywhere, and is very easy to install.
- Attractive On/Off LED control switch provides easy fingertip control and conveniently lights up to show when pump is running.
- Control switch overlay can be customized to meet specific customer graphic needs.
- Convenient built-in timer deactivates pump after 20 minutes, unless it is manually turned off first.

Electric specifications:

Input:	120 VAC, 60 Hz, 15 A (Nema plug or bare wire)
Outputs:	
Pump	1 Hp, 15A (Nema receptacle or 0.25" Quick Disconnect)
Temperature:	
Operational	32 to 104 °F (0 to 40 °C)
Non-operational	-4 to 158°F (-20 to 70°C)

Overview | **Main Features**



Gecko Alliance

450 des Canetons, Québec (QC) G2E 5W6 Canada, 800.78.GECKO, Fax: 418.872.0920
9225 Stellar Court, Corona, CA 92883 USA, 951.667.2000, Fax: 951.667.2902

© 2009 - Gecko Alliance