

Bi-Pin

Sunlite 40622-SU Q50/CL/GY6/120V Halogen 20-Watt Single Ended T3.5 Lght Bulb, 500 Lumen, 120 Volt, GY6.35 (Bi- Pin) Base, Clear, 2000 Hour Life Span, 3200K - Warm White 12 Pack


Single Ended T3.5

DESCRIPTION:

Sunlite Halogen Bulbs put out more lumens per watt (LPW) than standard incandescent bulbs. These 50-watt, 120-volt lamps feature a GY6.35 bi-pin base. Perfect for both indoor and outdoor applications. Use in chandeliers, track lighting, pendants, portable lamps, wall sconces, showcase displays, landscape lighting, and more. Convenient 12-pack.

FEATURES:

- **HALOGEN LAMPS** - These UV protected 50-watt 120-volt halogen bulbs produce more lumens per watt (LPW) than standard incandescent bulbs.
- **GY6.35 BASE** - These clear lamps feature a GY6.35 (bi-pin) base that works with a variety of applications. Each bulb measures 0.542 inches in diameter and 1.97 inches in overall height.
- **LONG LIFE** - With a 2000 hour life span these bulbs will last 1.8 years (based on 3 hours per day use).
- **DIMMABLE** - Fully dimmable when installed in a fixture with dimming control. Bright white, 500 lumen output.
- **INDOOR AND OUTDOOR USE** - These bulbs are perfect for both indoor and outdoor applications. Use in chandeliers, track lighting, pendants, portable lamps, wall sconces, showcase displays, outdoor lighting, and more.

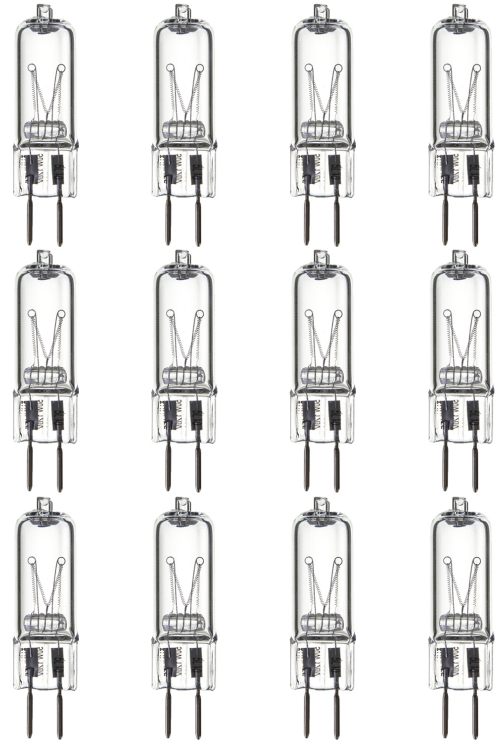

SPECIFICATIONS:

General Characteristics

Bulb Shape	<i>Bi-Pin</i>
Average Rated Hours	2000
Finish	<i>Clear</i>
Base	<i>2-Pin Glass (GY6.35)</i>
Average Life Span Years	2

Electrical Characteristics

Watts	50
Volts	120

Light Characteristics

Lumens Brightness	500
Color Rendering Index CRI	100
Coating	<i>UV Protected</i>
Emitted Color	<i>Bright White</i>
Color Temperature Kelvin	3200K

Product Dimensions

MOL (in)	1.97
Diameter (in)	0.542"
Item Dimension (in)	(W) 0.54 (H) 1.97 (D) 0.54
Package Dimension (in)	(W) 3.2 (H) 3.1 (D) 3.8
Package Weight (lb)	0.14

Product Data

Case Unit Rate	20
Pack Size	12
Item UPC	653703406220
Package Type	<i>Box</i>



DIMMABLE