



Smart Technology. Delivered.

Phantom TRA(B)7603 760-870 MHz Antennas



PHANTOM® ANTENNA IS IDEAL FOR 760-870 MHz LAND MOBILE RADIO APPLICATIONS

Laird's unique patented Phantom® is a tough low-profile antenna for outdoor or indoor applications. Measuring only 2.3" tall, the Phantom 760-870 MHz antenna revolutionary design features an omni-directional radiation and vertical polarization components. This gives the antenna frequency agility, low visibility, and a low angle radiation pattern that is superior to traditional gain antennas in most applications.

The industry standard NMO mounting socket mates with all Laird magnetic, trunk lid, and hole mounts.

The Phantom® patented technology is beneficial when high performance is desired and extreme ruggedness and low profile is required.


FEATURES

- Easy installation with optional NMO mounts
- Phantom® outperforms a 3dB whip in many applications
- UV treated radome resists sun damage

MARKETS

- Public safety
- Transportation
- Commercial & industrial communications

ANTENNA PATTERN

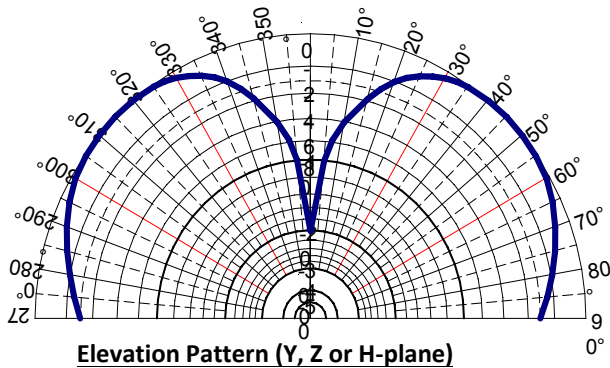

SPECIFICATIONS

ELECTRICAL

Frequency Range	760-870 MHz
VSWR	< 2:1 Max
Nominal Gain	3 dB - MEG (3 dBi)
Maximum Power	100 Watts
Nominal Impedance	50 Ω
Polarization	Vertical
Pattern	Omnidirectional
Half-Power Beamwidth	146° x 360°
Coaxial Cable Length & Type	None
Termination	NMO
Noise Suppressor	BlackHawk NS1535 1-35 VOLT, 15 Amp Noise Suppressor (Sold Separately)

MECHANICAL

Height	2.30"
Diameter	1.44"
Weight	0.15 lb
Color	Black or White
Radome Material	ABS
Rated Wind Velocity	125 mph (210 kph)
Rated Wind Velocity (with 0.5" radial ice)	85 mph (137 kph)
Lateral Thrust @ 125mph Wind Velocity	57 lbs (26 kg)
Wind Resistance in Sq. Feet	0.0230 sq. ft.
Mounting Information	NMO Mountable MB8, MAB8 (Sold separately)

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-PHANTOM TRA(B)7603 051815

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.