




SPECIFICATIONS

General	The PIM Shield Multi-Function Snap-in Adapter provides a low passive intermodulation method to support two stacks of Snap-in style cable hangers and/or one 3/8" threaded rod in high-risk PIM zones. (3/8" back nut not included).
Mounting	Secure the Snap-in Adapter to existing round or angle member using two PIM Shield Cable Straps (900443-16-50 or 900443-27-25) or equivalent. Torque 3/8" threaded hardware to 10 FT-LB (ConcealFab tool 900053).
Round Member Attachment	2.37-inch minimum outside diameter
Angle Member Attachment	0.38-inch maximum angle flange thickness
System PIM Performance	IM3 <-100 dBm when tested in accordance with proposed IEC 62037-8, near field test, 2x 20W test tones, while subjected to dynamic stimulus. To achieve specified PIM performance, torque 3/8" hardware to 10 FT-LB.
Material	UV Stable, glass filled Nylon
Operating Temperature	-40°C to +70°C
Case Dimensions	15-inch x 11-inch x 8-inch
Case Weight	8.4 Lbs.
Qty. Per Case	10

2X SNAP-IN LAUNCH 1X THREADED ROD LAUNCH

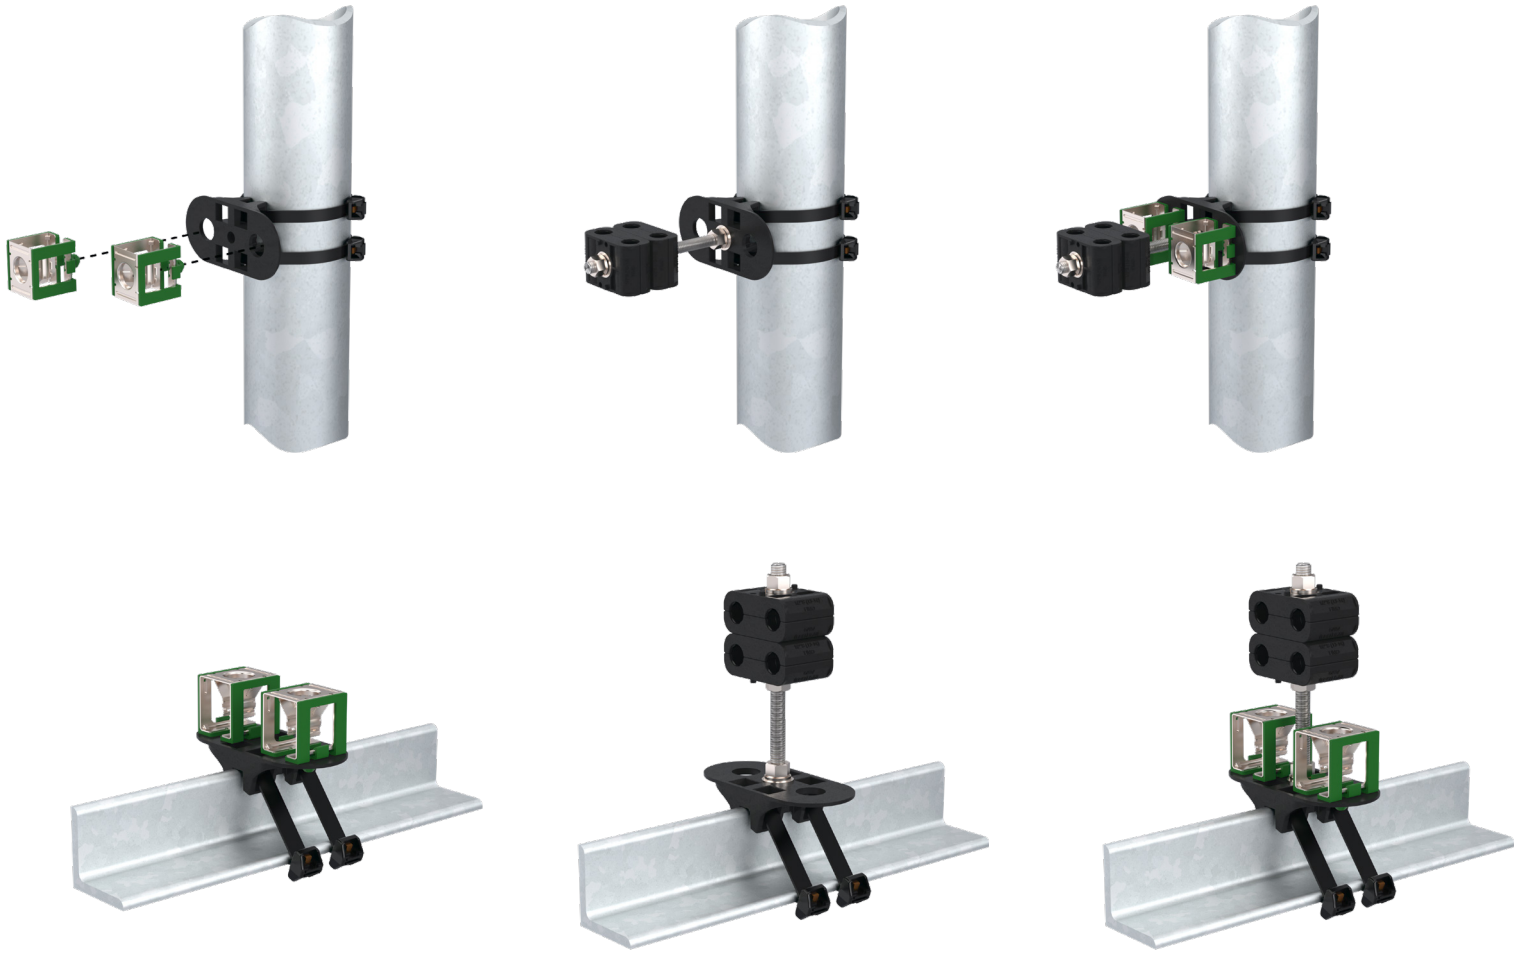

Patent Pending design allows secure attachment to round or angle members at cell sites.

