


900712-10



SPECIFICATIONS

For patents see www.cf-pat.com

General	When combined with a Universal Base (900638-10 or 900639-10) the PIM Shield Threaded Rod Adapter provides a low passive intermodulation method to secure Cable Support Blocks in high risk PIM zones. The Threaded Rod adapter allows 3/8-in or 10mm diameter threaded rods to be secured in two different directions relative to the base for maximum installation flexibility.
Mounting	Insert the Threaded Rod Adapter into a Universal Base and secure the assembly to structural members using two PIM Shield Cable Straps (900443-16-50 or 900443-27-25) or equivalent.
System PIM performance	IM3 <-100 dBm when tested in accordance with proposed IEC 62037-8, near field test, 2x 20W test tones, while subjected to dynamic stimulus
Material	UV stable, glass filled Nylon
Plastic Base Color	Black
Operating temperature	-40°C to +70°C
Case dimensions	15-inch x 11-inch x 8.0-inch
Case weight	7.8 lb.
Qty per case	10 kits of 10

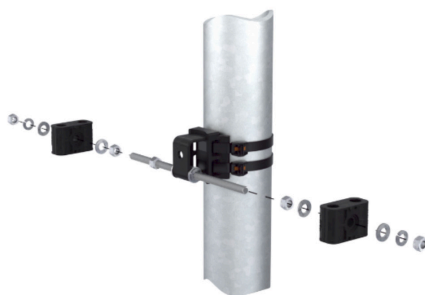

Threaded Rod Adapter with Universal Round Member base 900638-10



Threaded Rod Adapter with Universal Angle Adapter base 900639-10