
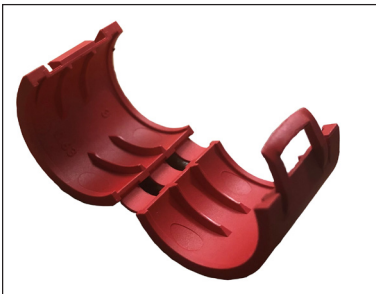


Ruggedized Cable Accessories

ColorCodedCuffs™


Siemon ColorCodedCuffs™ (CCC) offer telecom installers an updated means to identify carrier equipment with a safe, robust, quick to install cable identification system. The injection-molded, single piece design allows for toolless, one-handed installations with 360° coverage, even while wearing work gloves.

Designed for 0.5 in. nominal coax cable in harsh, outdoor environments, Siemon's CCCs are composed of chemical resistant materials suitable for ultraviolet exposure, water immersion and ice build-up. A superior alternative to electrical tape, CCCs are color-matched to industry standards and are an Eco-friendly and durable identification solution that does not require tools and eliminates field issues associated with tape flags and deteriorating adhesive.

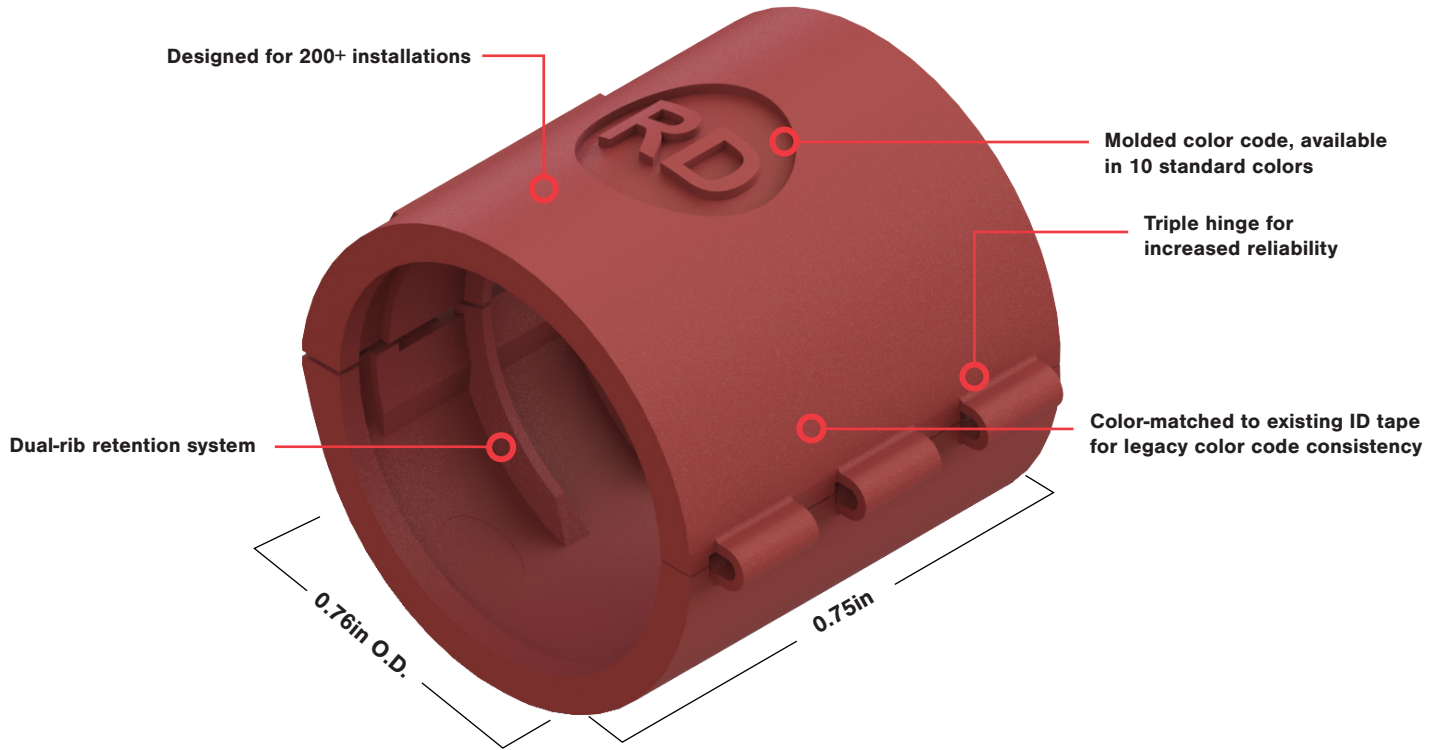

Single Piece Design

The injection-molded, single piece design makes it easy to install cuffs onto cables, even while wearing work gloves.

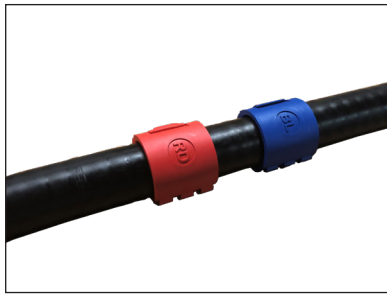

360° Visibility

Full 360° coverage in easy to identify industry standard colors.



Ruggedized Construction

Designed with UV and environmental rated materials to meet 746C (f1) standards.

Product Information

Ordering Information

	Color	Part Number
	Blue	CCC-0.63-C10-BL
	Brown	CCC-0.63-C10-BN
	Green	CCC-0.63-C10-GN
	Orange	CCC-0.63-C10-OR
	Red	CCC-0.63-C10-RD
	Pink	CCC-0.63-C10-PK
	Slate	CCC-0.63-C10-SL
	Violet	CCC-0.63-C10-VT
	White	CCC-0.63-C10-WT
	Yellow	CCC-0.63-C10-YL

Mechanical Parameters	
Cable O.D.	0.63in (16.0mm) (0.5in Nominal Coaxial Cable)
Dimensions (installed)	0.75in (19.1mm) Wide x \varnothing 0.76 in (19.3mm)
Retention Force	20N (4.5 lbf) to 70N (15.7 lbf) based on cable
Installation Temperature	-25°C to 70°C (-13°F to 158°F)
Operating Temperature	-45°C to 70°C (-49°F to 158°F)
Storage Temperature	-45°C to 70°C (-49°F to 158°F)
Cycle Life	200 Cycles
Material	Polypropylene, Flame Retardant, UV Stabilized, PVC Free, RoHS, REACH
Flammability Rating	UL 94 V-0 IEC 60695-11-10, -20
Plenum Rating	Designed to meet UL 2043 specifications
Outdoor Suitability	Designed to meet UL 746C (f1) specifications
UV Resistance	Suitable for indoor or outdoor use
Environmental Standards	IEC 60068 Mil-STD-810GH
Shelf Life	20 Years

Please contact Customer Service for additional color options.

For more information, please visit www.siemon.com/ccc

Warranty Policy

The Siemon Company warrants such product to be free from defects in material and workmanship. The Siemon Company will, upon written notice from Buyer of such non-conformity within three (3) year after date of shipment, either replace it F.O.B. original point of delivery, or refund the purchase price, at The Siemon Company's option. The remedies provided herein shall be Buyer's sole and exclusive remedies, and no statement or recommendation not contained herein shall have any force or effect unless in writing and signed by an authorized officer of The Siemon Company. THE SIEMON COMPANY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF ANY PRODUCT SOLD. IN NO EVENT WILL THE SIEMON COMPANY BE LIABLE FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, WHETHER ASSERTED IN CONTRACT, TORT, OR OTHERWISE.

If this product should be defective, please contact our Customer Service team at 860-945-4213 or by email at customer_service@siemon.com

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America P: (1) 860 945 4200	Asia Pacific P: (61) 2 8977 7500	Latin America P: (571) 657 1950/51/52	Europe P: (44) 0 1932 571771	China P: (86) 215385 0303	India Africa & Middle East P: (971) 4 3689743
---	--	---	--	-------------------------------------	---

Siemon Interconnect Solutions
P: (1) 860 945 4213
www.siemon.com/SIS

WWW.SIEMON.COM

