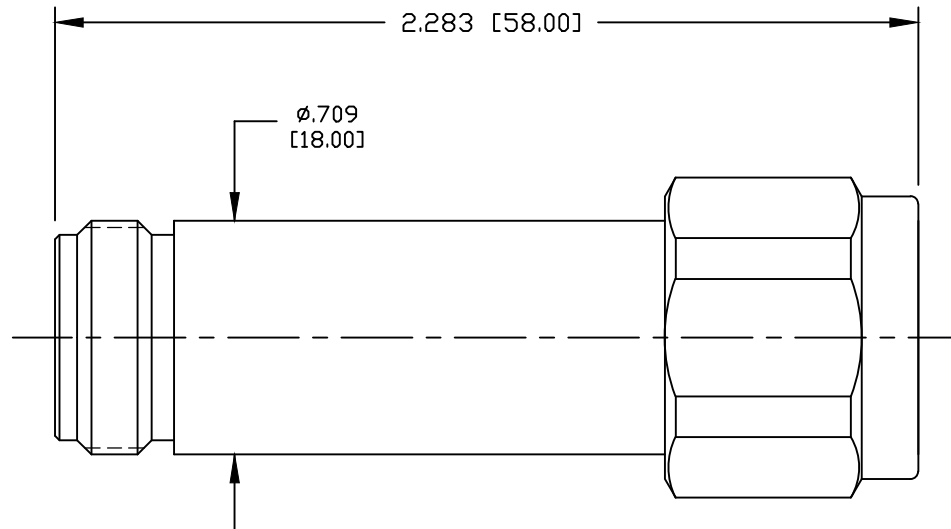


PART NO.

RF-ATN-NMF-5W6

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	10/10/18	JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: 0-3 GHz
 POWER: 5 WATT (AVERAGE)
 VSWR MAX: $\leq 1.2:1$
 ATTENUATION: 6dB
 ACCURACY: ± 0.8 dB
 OPERATING TEMPERATURE: -30°C TO $+65^{\circ}\text{C}$

NOTES:

ALL CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER OUTLINE DRAWING		RoHS COMPLIANT	RFconnectors DIVISION OF RF INDUSTRIES, LTD. 7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX	
ALL DIMENSIONS ARE REFERENCE ONLY				
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		5 WATT ATTENUATOR N MALE TO N FEMALE 6dB		
DRAWN C. ZUNIGA CHECKED	10/10/18	PROPRIETARY AND CONFIDENTIAL THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.		DWG NO. RF-ATN-NMF-5W6
ORJ DRAWN C. ZUNIGA	10/10/18	SIZE A	CABLE GROUP	REVISION —
		SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1