


SPECIFICATIONS

General	The PIM Shield Multi-Function Cable Support Base with stainless-steel nut is designed to be used with a new stainless-steel PIM Shield Threaded Rod Kit (or with existing 3/8" stainless-steel threaded hardware at the site) to provide a low passive intermodulation method to secure cables in high-risk PIM zones.
Mounting	Secure Cable Support Base to existing round or angle member using PIM Shield Cable Strap (900443-16-50 or 900443-27-25) or equivalent. Torque 3/8" threaded hardware to 10 FT-LB (ConcealFab tool 900053)
Round Member Attachment	2.37-inch minimum outside diameter
Angle Member Attachment	0.25-inch maximum angle flange thickness
Hardware Size	3/8-16 UNC
System PIM Performance	IM3 <-100 dBm when tested in accordance with proposed IEC 62037-8, near field test, 2x 20W test tones, while subjected to dynamic stimulus. To achieve specified PIM performance, torque hardware to 10 FT-LB.
Material	Plastic Base – UV Stable, glass filled Nylon Nut – Stainless-steel
Operating Temperature	-40°C to +70°C
Case Dimensions	12.5-inch x 9.5-inch x 7-inch
Case Weight	7.8 Lbs.
Qty. Per Case	10

1X THREADED ROD LAUNCH

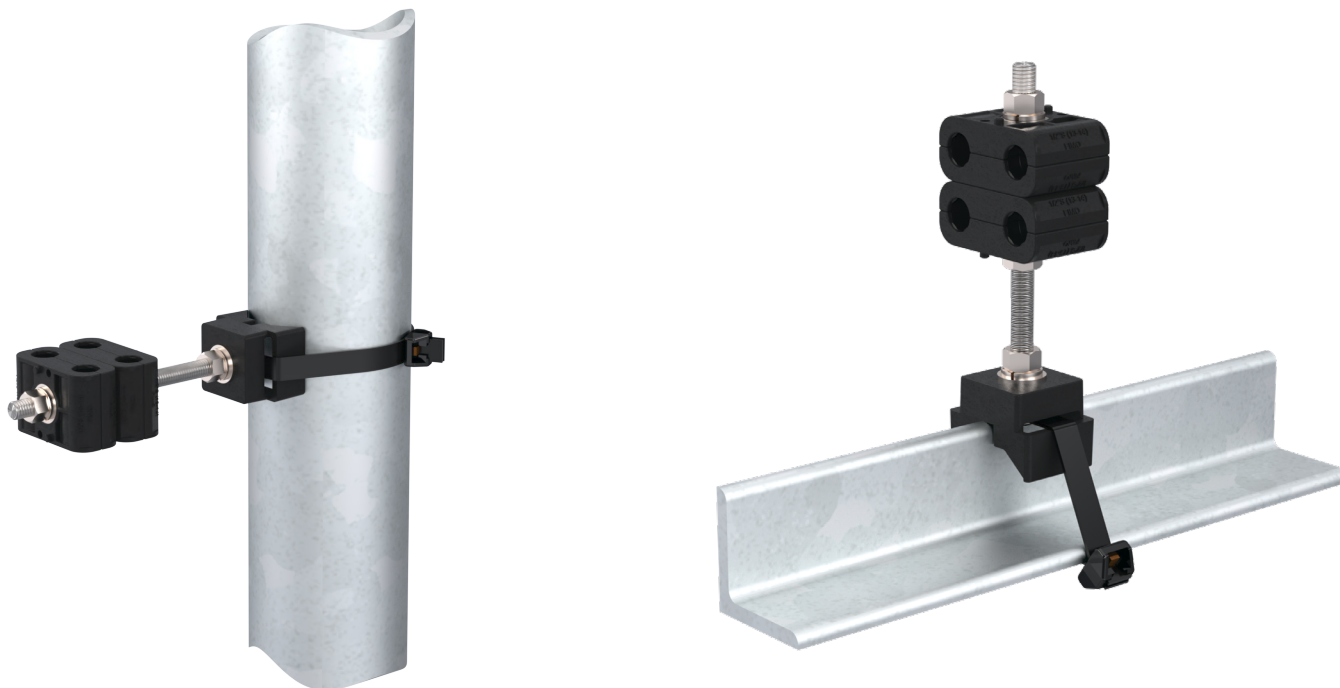

Patent Pending design allows secure attachment to round or angle members at cell sites.

