



Laird Connectivity's patent-pending WPD136M6C-001 multi-band mobile antenna is a commercial, heavy-duty vehicular antenna. It has an omnidirectional pattern and is vertically polarized with a 50Ω match. It also has excellent quality and RF performance and is specifically designed as a full spectrum public safety voice and data communications antenna.

FEATURES AND BENEFITS

- High-performance, broad-banded, multi-band coverage
- Heavy-duty design
- Injection molded housing and base
- No base radiators (all enclosed coils)
- Solid brass chrome-plated ferrules with dual set screw lock

APPLICATIONS

- General analog and digital voice/data communications
- VHF (high), UHF, 700/800
- Tetra PMR and P25 public safety
- Transportation, utilities, government, military, PAMR, commercial and industry, oil and gas

ELECTRICAL SPECIFICATIONS

Model Name	WPD136M6C-001		
Operating Frequency (MHz)	136-174	380-520	760-870
VSWR – Max	≤ 2.5:1		
Gain (dBi)	Unity		
Peak Gain (dBi) – Azimuth Cut (Phi = 0°)	-0.7	-3.7	3.1
Peak Gain (dBi) – Elevation Cut (Phi = 0°)	0.2	4.8	8.1
Nominal Impedance (Ohms)	50		
Max Power - Ambient 25°C (W)	100		
Polarization	Vertical		
Pattern	Omnidirectional		
Vertical Plane 3 dB Beamwidth	90°	40°	60°
Horizontal Plane 3 dB Beamwidth Port 1	360°	360°	360°

MECHANICAL SPECIFICATIONS

Dimensions – round base x height – cm (inches)	6.35 x 50.8 (2.5 x 20.0)
Connector	NMO
Radome Material	High impact PC/ABS

ENVIRONMENTAL SPECIFICATIONS

Ingress Protection Rating	IP66
Material Substance Compliance	RoHS

VHF BAND (136-174 MHz)

Peak Gain (dBi)	Azimuth Pattern	Elevation Pattern
136 MHz	-2.4	0.2
146 MHz	-2.7	-1.8
156 MHz	-0.7	-3.1
174 MHz	-3.5	-4.1

UHF BAND (760-870 MHz)

760 MHz	3.1	3.1
815 MHz	-0.2	7.9
870 MHz	-8.8	8.1


UHF BAND (380-520 MHz)

Peak Gain (dBi)	Azimuth Pattern	Elevation Pattern
380 MHz	-11.3	6.1
400 MHz	-7.0	7.7
440 MHz	-4.1	4.8
460 MHz	-3.7	3.0
500 MHz	-5.5	3.3
520 MHz	-6.6	3.5


RADIATION PATTERNS

156 MHz

Azimuth Cut, Phi=0°

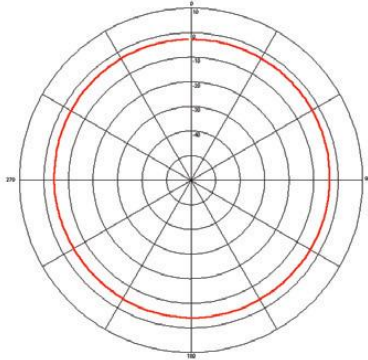


Elevation Cut, Phi=90°

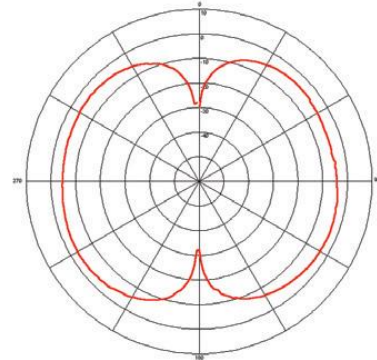


440 MHz

Azimuth Cut, Phi=0°

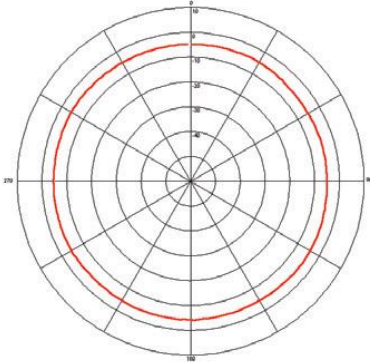


Elevation Cut, Phi=90°

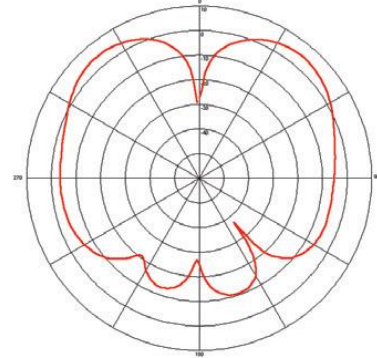


815 MHz

Azimuth Cut, Phi=0°

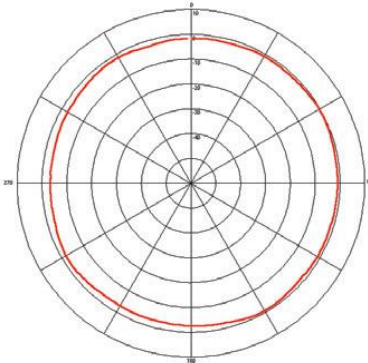

Elevation Cut, Phi=90°

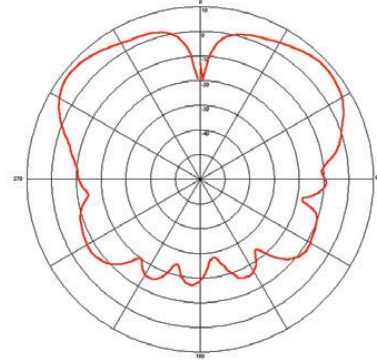

✓RoHS

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2019 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

sales@lairdconnect.com
support@lairdconnect.com
www.lairdconnect.com

