



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,  
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED  
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.  
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY


PART NO.

**RFB-1123-C1**


REV	DESCRIPTION	DWN	DATE	APPROVED
A	ENGINEERING RELEASE	KMM	3/6/99	R. RICE
B	CHANGE FERRULE STUD TO KNURL	CZS	4/1/05	J. D. McR.

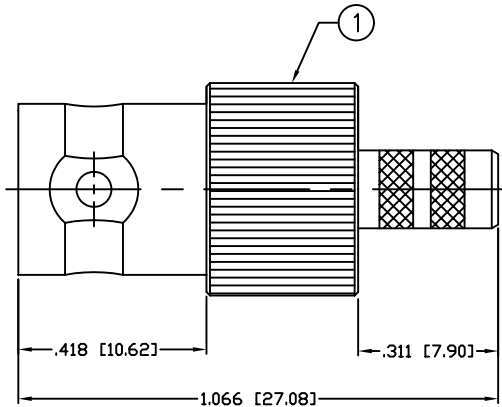

RECOMMENDED CRIMP DIE: .068"



RECOMMENDED CRIMP DIE: .213"

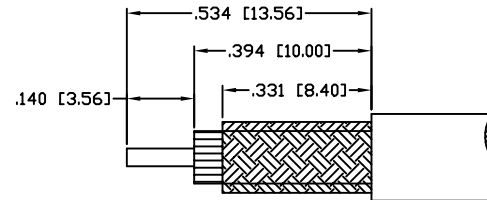

RECOMMENDED STRIPPING DIMENSIONS

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms  
 FREQUENCY RANGE: 0-4 GHz  
 VSWR: 1.3 Max.  
 WORKING VOLTAGE: 500 V rms @ sea level  
 TEMPERATURE RANGE: -65°C TO 165°C  
 INSULATION RESISTANCE: 5k M Ohms min.  
 FOR RG-55, 55A, 55B, 142, 142A, 142B, 223 & 400/U,  
 ALPHA 9055, 9055B, 9223, BELDEN 8219, 83242, 84142

1	BODY	1	BRASS	NICKEL, 80μ"	000486	UNLESS OTHERWISE SPECIFIED:
2	CONTACT	1	BRASS	GOLD, 3μ"		
3	DIELECTRIC	1	PTFE	---		
4	WASHER	1	BRASS	NICKEL, 80μ"		
5	FERRULE	1	BRASS	NICKEL, 80μ"		
6						
7						
8						
9						
10					DRAWN	DIMENSIONS ARE IN INCHES AND [MILLIMETERS] UNLESS OTHERWISE NOTED TOLERANCES ARE: DECIMALS      DIAMETER
11				C. ZUNIGA	4/1/05	
12				CHECKED		
13				ORJ DRAWN		
14				K. MAXWELL	3/6/99	
#	DESCRIPTION	QTY	MATRL	FINISH	APPROVALS	DATE

**RFconnectors**  
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD  
 SAN DIEGO, CA 92126  
 (858) 549-6340  
 (858) 549-6345 FAX

**BNC JACK CRIMP**

SIZE A	CABLE GROUP C1	DWG NO. RFB-1123-C1	REV B
SCALE: NTS	CAD FILE OUTLINE	SHEET 1 OF 1	