


TECHNICAL DATA SHEET - INTERACTIVE PDF

# Cable Tie, standard, 50 lbs. series

## Natural and UV resistant black


**Catamount®**

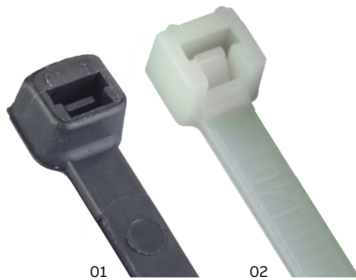

01

02

01 UV resistant (-0)  
02 Natural (-9)

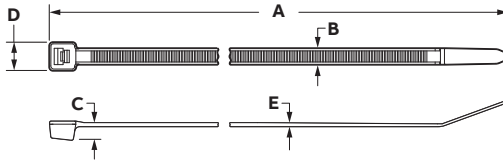

### Ratings:

- Tensile Strength: 50lb (222N)
- Min. Operating Temperature: -40°F (-40°C)
- Max. Operating Temperature: 185°F (85°C)
- Min. Installation Temperature: -4°F (-20°C)

### Installation:

- Install with approved ABB cable tie tool such as [ERG50](#) , [QC-100](#), [L-200](#), [L-400-C](#)

### Materials / Finishes:

- Natural Polyamide (Nylon 6.6)
- UV-resistant black (Nylon 6.6)

### Conforms to:

- AH-2 Plenum Rated
- UL94 V-2
- Type 21S

[tnb.abb.com](http://tnb.abb.com) (US/Latin America)  
[tnb.ca.abb.com](http://tnb.ca.abb.com) (Canada)  
[abb.com](http://abb.com)

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction – in whole or in part – is forbidden without prior written consent of ABB.  
© 2020 ABB Installation Products Inc. and/or its related companies. All Rights Reserved.

Cable ties are primarily used to cinch wires and cables together to form a neat and organized bundle.

### Certifications / Standards:



### 3-Part Specification: End User Tools

Product selection - in. (mm)							
Part no: GID no:	A ±0.25 (6.4)	B ±0.01 (0.25)	C ±0.03 (0.76)	D ±0.03 (0.76)	E ±0.01 (0.25)	Min. bundle dia.	Max. bundle dia.
<a href="#">L-7-50-0-C</a> <a href="#">7TAG054290R0012</a>	7.6 (192)	0.18 (4.6)	0.22 (5.5)	0.30 (7.6)	0.05 (1.3)	0.06 (1.57)	1.87 (47.6)
<a href="#">L-7-50-0-M</a> <a href="#">7TAG054330R0007</a>	7.6 (192)						
<a href="#">L-7-50-9-C</a> <a href="#">7TAG054290R0013</a>	7.6 (192)						
<a href="#">L-7-50-9-M</a> <a href="#">7TAG054330R0008</a>	7.6 (192)						
<a href="#">L-11-50-0-C</a>	11.3 (286)	11.3 (286)					3.06 (77.7)
<a href="#">L-11-50-0-D</a>	11.3 (286)						
<a href="#">L-11-50-9-C</a>	11.3 (286)						
<a href="#">L-11-50-9-D</a>	11.3 (286)						
<a href="#">L-14-50-0-C</a>	14.3 (364)	14.3 (364)					4.00 (101.6)
<a href="#">L-14-50-9-L</a>	14.3 (364)						
<a href="#">L-14-50-0-L</a>	14.3 (364)						
<a href="#">L-14-50-0-D</a>	14.3 (364)						
<a href="#">L-14-50-9-C</a>	14.3 (364)						
<a href="#">L-14-50-9-D</a>	14.3 (364)						

Note: Product must be installed in accordance with applicable national and local electrical codes.