WPS-4F

Weather Protection System: 4.3-10 Female Antenna Port/Device Seal

[Installation instructions](#)

[WPS cross-reference chart](#)
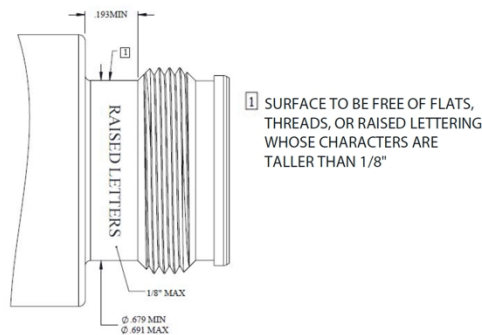
Contact technical support:
1-888-201-6073
techsupport@jmawireless.com

General	Specification	Comment
Ports supported	See figure below.	
Dimensions in. (mm)	1.10 x .31 (27.9 x 7.87)	
Weight	0.01 lb	5.4 g	
Material	Silicone rubber	
Reusability	Unlimited	

Environmental	Specification	Comment
Installation temperature	-40 °C to +65 °C (-40 °F to 149 °F)	
Operating temperature	-40 °C to +65 °C (-40 °F to 149 °F)	
Storage temperature	-55 °C to +85 °C (-67 °F to 185 °F)	
Moisture resistance	No leakage	ANSI/SCTE 60 2004, IP-67, IP-68
Corrosion resistance	1000 hours	ASTM B117
U.V. resistance	Exposure to UV light for 1000 hours per ASTM G 53 using UVB-313 type lamps	
H.A.L.T.	40 hours	
Fire rating	UL94 HB	

WPS-4F COMPATIBLE PORT SPECIFICATION

.193MIN

RAISED LETTERS

1 SURFACE TO BE FREE OF FLATS, THREADS, OR RAISED LETTERING WHOSE CHARACTERS ARE TALLER THAN 1/8"

1/8" MAX

Ø.679 MIN
Ø.691 MAX

07/03/19

5G Lte 4DVANCED RoHS 2002/95/EC