


1004 Uni Pro Seat
& Suspension
PN: 7879



Note!

Weight needs to be applied to the suspension to turn the mechanical knobs.

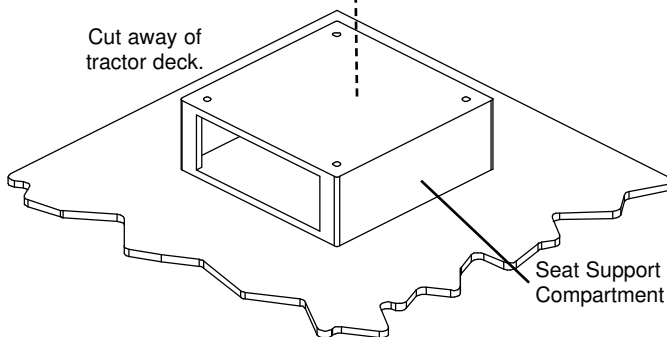

Installation Instructions to Replace a Case 90-94 Series Original Hydraulic Seat and Suspension with a 1004 Uni Pro Seat and Suspension

1. Remove the original seat and suspension.
2. Cap the hydraulic lines with the nuts and plugs provided. Cut and plug the breather line by turning a 5/16" bolt into the tube.
3. Place the suspension on the raised seat support compartment. Mark and drill four 5/16" holes into the compartment, if needed.
4. Bolt the suspension to the seat support compartment with four 5/16" x 1" bolts and flange nuts.