


IH 66 Cowl Cover - PN: 4041

1 Pc. - Black 64 HPSI

Material PN: 4008

Fits Models: 766, 1066, 1466, 1566 and 1568

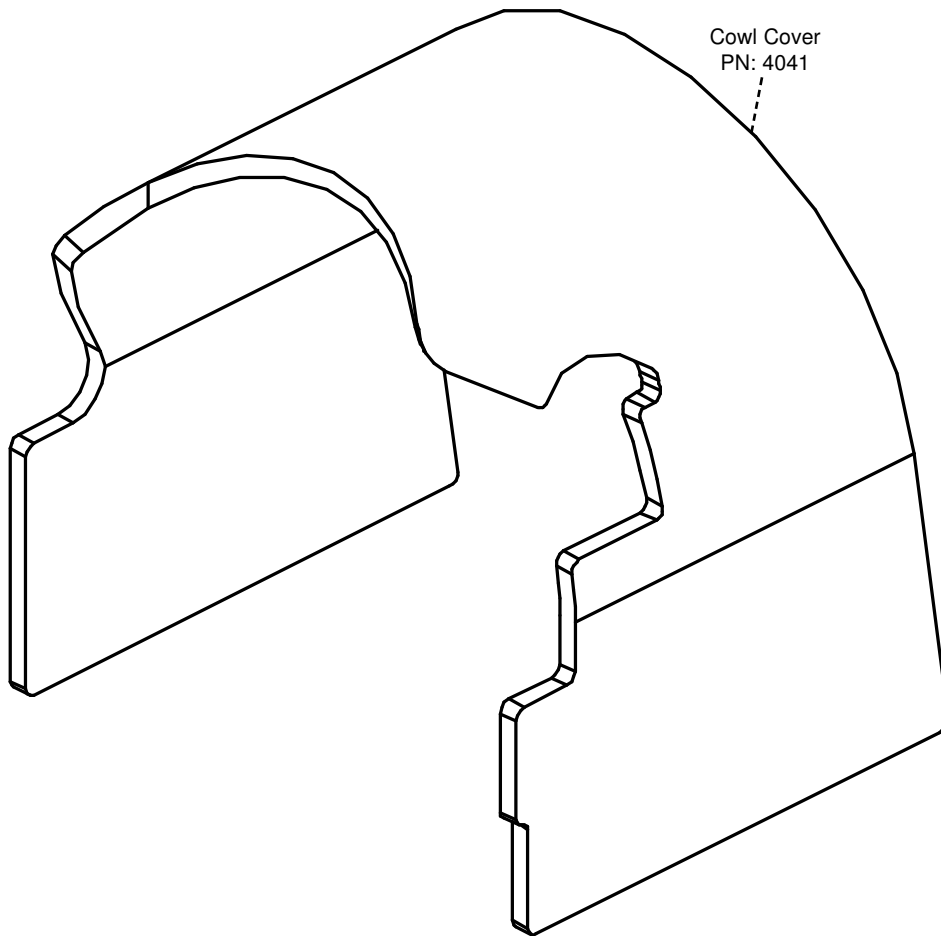

1. Remove the old Cowl Cover and prepare the area for the new Cowl Cover.
2. Remove existing foam and old glue residue as much as possible using a putty knife, wire brush, etc. If there is oil present, this must also be removed with a solvent. (Make sure this is done in a well ventilated area.)
3. The new Cowl Cover will be fastened with the velcro provided in the kit. Cut the velcro to the same length as the lines that are marked on the back side of the Cowl Cover. Stick one side of the velcro to the lines marked on the back, then attach the opposite side of the velcro to that. (Do not remove the tape until you are ready to install the Cowl Cover).



Phone - 800.328.1752

Fax - 320.329.3709

Email - sales@tractorseats.com

Web Site - www.tractorseats.com

P.O. Box 409 - 308 NW 2nd Street

Renville, MN 56284