WINGITS® PREMIUM Stainless Stool Cro

Stainless Steel Grab Bar - Diamond Knurled

Model: WGB5KN

Part Numbers:

WGB5PSKN12 12" Polished Finish

WGB5SSKN12 12" Satin Finish

WGB5PSKN16 16" Polished Finish

WGB5SSKN16 16" Satin Finish

WGB5PSKN18 18" Polished Finish

WGB5PSKN24 24'' Polished Finish

WGB5PSKN30

24" Satin Finish

WGB5SSKN30 30'' Polished Finish

WGB5PSKN32 32'' Polished Finish

WGB5PSKN36 36'' Polished Finish

WGB5PSKN42 42" Polished Finish

WGB5PSKN48 48'' Polished Finish

WGB5SSKN18 18" Satin Finish WGB5SSKN24

30" Satin Finish

WGB5SSKN32 32" Satin Finish

WGB5SSKN36 36" Satin Finish

WGB5SSKN42 42" Satin Finish


WGB5SSKN48 48" Satin Finish



- All parts are Stainless Steel tubing is 18-gauge (1.2mm)
- Mounting Flanges are 3" (75mm) in diameter, 3/32" (2.5mm) thick, HeliArc welded to the tubing. Mounting Flanges have 5 holes for attachment to WINGITS or adequate blocking.
- Snap-On Flange Covers are 22 gauge (0.8mm) drawn stainless steel, 3"(76mm) in diameter and 3/8" (10mm) in height.
- Provide 1-1/2" (38mm) clearance from wall.
- Anti-Slip Grab Bar that repels dirt and bacteria

	CHANICAL DATA
	(idth: See product part number for width. Complete length of Grab Bar is usable surface. iameter: 1.25" (3.2cm)
PRO	DUCT COMPOSITION
Er	ntire product is stainless steel.
MOD	DALITY
	se: Wall Installation. bad Capability: 800 lbs (362.9kg)
INST	TALLATION
	INGITS® PREMIUM [™] Structural Stainless Steel Grab Bars are designed to hold live loads and ust be installed into adequate structural blocking or with WINGITS® Grab Bar Fasteners
CER	TIFICATIONS
ар	INGITS® PREMIUM [™] Structural Stainless Steel Grab Bars meet or exceed the oplicable requirements of all building codes, ADA criteria, and 2010 ADAAG and 009 ANSI standards.
REC	OMMENDED INTEGRATION
Ec	or hollow wall construction, it is recommended that WingIts ® Grab Bar Fasteners

WINGITS®

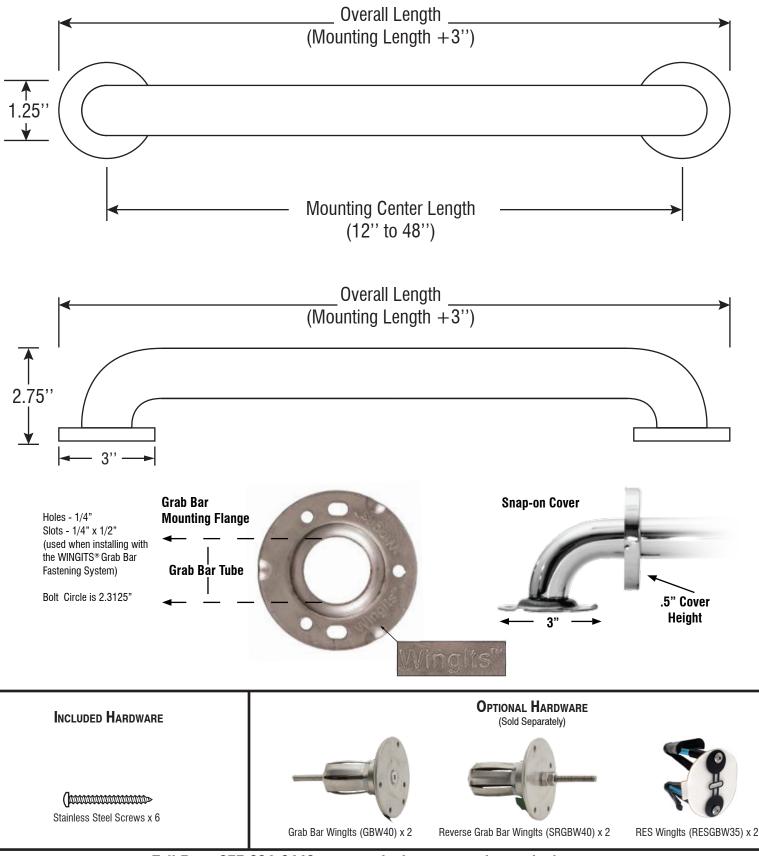

Toll Free: 877-894-6448 • www.wingits.com • sales@wingits.com