

Solar Shield for Meraki MR70




Front




Back

Ventev's Solar Shield for Meraki's MR70 is an injection-molded polycarbonate cover with UV stabilizers to protect the access point from UV damage, tampering, debris and impact. The simple design enables quick installation. Drainage slots on all sides prevent water from being trapped inside. *Every Ventev enclosure is covered by the company's two-year TerraNet warranty program.*

For more information or to purchase, contact Ventev: 800.851.4965 or sales@ventev.com.

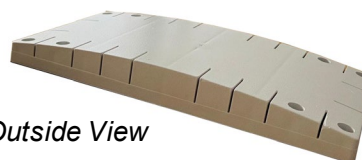

Outside View

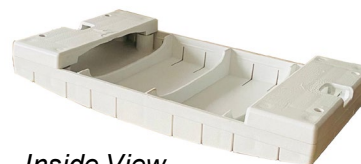

Inside View

SPECIFICATIONS

SKU: 224910

Product Number: VNV-SOL-MR70

Dimensions: 12.75" x 11.2" x 6.5" [324 x 284 x 164 mm]

Weight: .5 lb


Construction: UV-resistant and RF-transparent polycarbonate cover, powder-coated heavy gauge aluminum mount plate, gasket, cord grip, breather vent and hardware to mount on concrete

Mounting to Access Point: Clamps to the Meraki MR70 using supplied hardware. The cover can be installed prior to, or after all connections are made.

FEATURES AND BENEFITS

- Protects AP from impact or tampering
- Constructed with rugged polycarbonate cover and powder-coated heavy-gauge aluminum backplate
- Drainage slots prevent water build-up
- Clamps on access point and mounts to concrete or any flat surface. Hardware to mount included.
- UV-resistant and RF-transparent
- Sturdy, lightweight and economical

Solar Shield for Meraki MR70


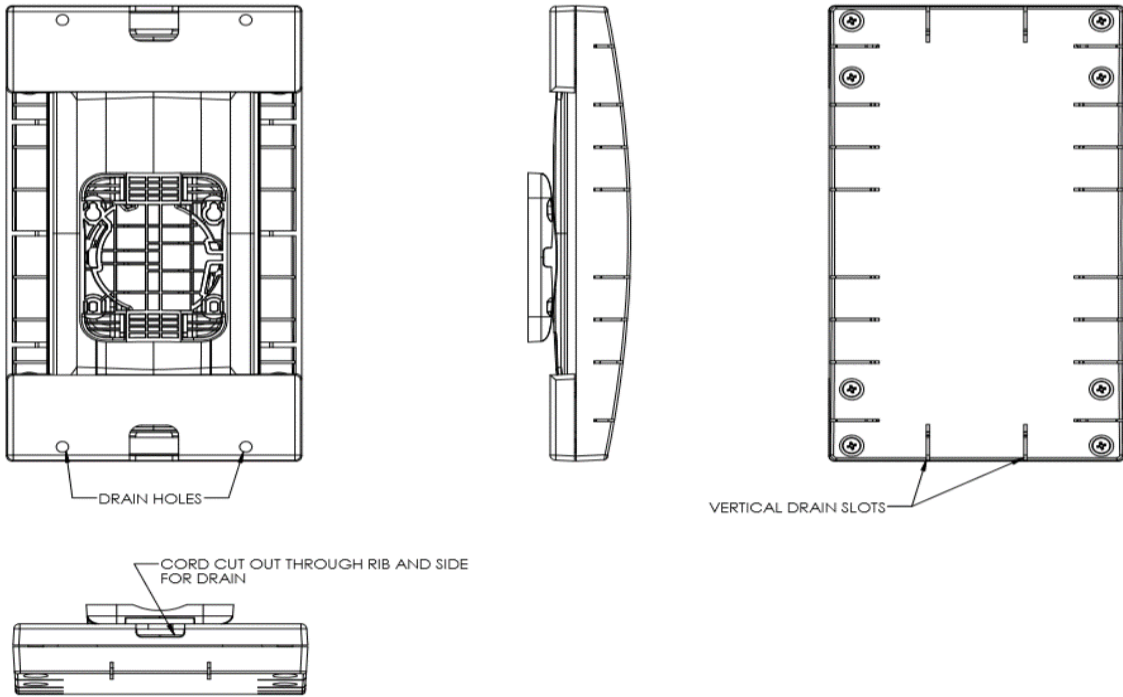


Solar Cover Installation Instructions

Components:

- Qty 1 Cover
- Qty 2 Back Plates
- Qty 8 Screws
- Tools required: Phillips Screwdriver

Step 3: Slide the cover onto the Ap and secure the cover by attaching each back plate with qty 4 screws that are provided. The cover is symmetric so it can be installed in any direction.

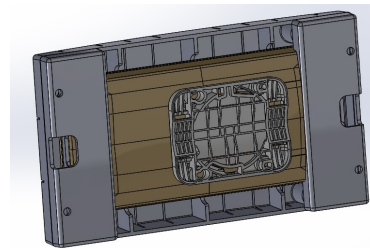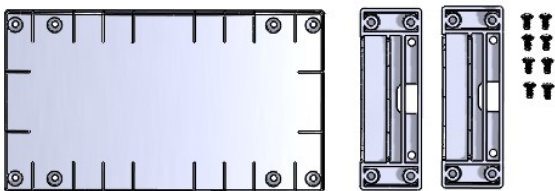

Step 1: Mount the Meraki AP per the manufacturer's instructions

Step 2: Run the data cable thru center hole of one back plate and connect the data cable to the ap per the manufacturer's instructions.

