

69200 GM DURAMAX CRANKSHAFT AND FLYWHEEL KIT


Servicing GM Duramax diesel trucks with 36mm 12 Point 3/4" drive impact socket to remove the crank bolt requires a torque of 285 ft. lbs. The 14mm 1/2"drive stubby impact Allen socket aids the technician in removal and installation of the flywheel. Torque specs are 58 ft. lbs. plus 120° of torque angle.

Applications: GM Duramax diesel trucks 6.6L 2001 - present



69250 GM DURAMAX FLYWHEEL LOCK Holds flywheel in place when removing or replacing the crankshaft bolt. Simply remove the inspection window cover on the transmission, slide the flywheel lock tool through the inspection window until flywheel is engaged for removal of crankshaft.

Applications: GM Duramax diesel trucks 6.6L 2001 and later

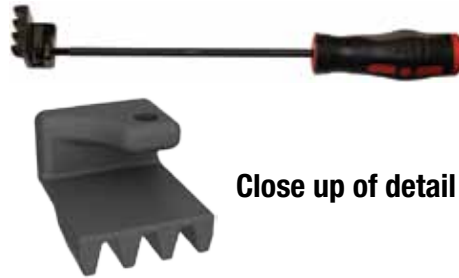

Close up of detail



69610 12mm HUB BEARING REMOVERS Threaded design helps to remove the hub bearings that are rusted to the steering knuckle, without removing the steering knuckle from the vehicle or the CV axle assembly. When utilized properly does not require the use of a press.

Applications: Chrysler, GM, Ford, Mazda, Saturn, Volvo, Isuzu and other vehicles with 12mm X 1.75 thread.



69630 14mm HUB BEARING REMOVERS Threaded design helps to remove the hub bearings that are rusted to the steering knuckle, without removing the steering knuckle from the vehicle or the CV axle assembly. When utilized properly, this does not require the use of a press.

Applications: Chrysler, GM, Ford, Honda, Nissan, Infinity VW, Audi, Mazda, Volvo, Mitsubishi, Kia, Hummer, and other vehicles with 14mm X 1.5 tread.



69800 VOLVO FUEL PUMP SOCKET Quickly and easily access the XC90s left tank unit retaining nut without removing the large frame under the seat bottom.

Factory tool: 9995720
69800 Outside diameter 4.5"

Applications: Volvo S80 1999 & later
All other Volvo's 2001 & later



UNIVERSAL TOOLS

**10500 PARKING BRAKE
CABLE COUPLER TOOL**



See Page 5

**11100 MANUAL BUSHING
R&R TOOL SET**



See Page 7

**11600 EXTRA LONG AIR
HAMMER PNEUMATIC
DRIFTS**



See Page 7

**11880 HEAVY-DUTY
PITMAN ARM POPPER**



See Page 8

**13000 STAKED AXLE
NUT PUNCHES**



See Page 10

**13700 ALL-IN-ONE
FLUID STOPPER**



See Page 12

**14000 BOSCH DIRECT
INJECTION INJECTOR
PULLER KIT**



See Page 12

15300 EGT SENSOR SOCKETS



See Page 14

**15600 BATTERY CABLE
CRIMPER**



See Page 14

**65350 UNIVERSAL LONG
REACH SPARK PLUG BOOT
PULLER**



See Page 18

**66100, 66110, 66120 HEAD
HANDLER 6mm, 1/4",
8mm set of 3 sizes**



See Page 18

**67300 UNIVERSAL BRAKE
CALIPER TOOL AND 1/2"
DRIVE ADAPTER**



See Page 19

**67380 3/8" DRIVE BRAKE
CALIPER ADAPTER**



See Page 19

**67700 MAGNETIC WASHER
REMOVER**



See Page 20

**67750A SUPER DUTY 12 &
6 POINT OXYGEN SENSOR
WRENCH WITH HANDLE**



See Page 20

67900 OrganizeAIR™



See Page 20

**68800 LOW-PROFILE
PITMAN ARM POPPER**



See Page 21

**69610, 69630 HUB BEARING
REMOVER 12mm, 14mm**



See Page 22

**86100B UNIVERSAL
BRAKE CALIPER TOOL**



See Page 24

**86100B-7 1/2" DRIVE
BRAKE CALIPER ADAPTER**



See Page 25

88150 BENCH HEAD STAND



See Page 25

**88750B COMPACT SUPER
DUTY 12-AND 6-POINT
OXYGEN SENSOR WRENCH**



See Page 26

**88800 UNIVERSAL VALVE
ADJUSTMENT TOOL 13mm**



See Page 26

**88900 UNIVERSAL VALVE
ADJUSTMENT TOOL 12mm**



See Page 26

**88950 UNIVERSAL VALVE
ADJUSTMENT TOOL 10mm**



See Page 26