



290EAZ

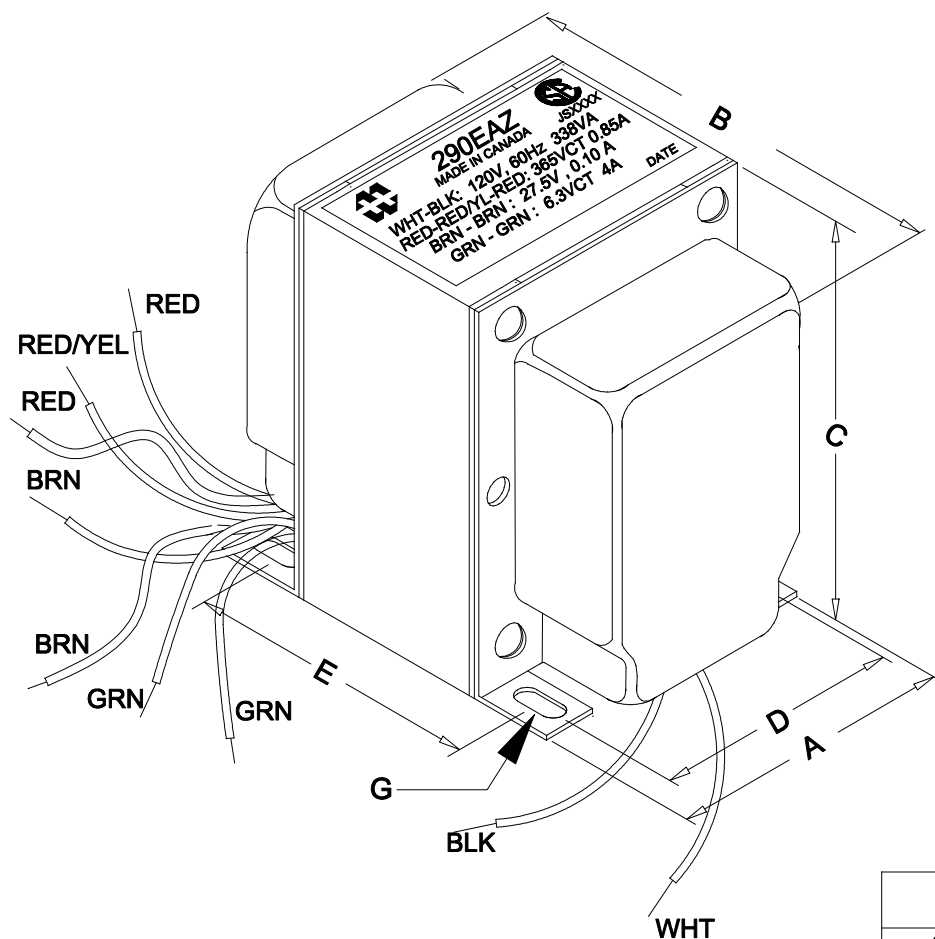

NOTE: ALL LEADS 12" OUT MIN.

DIMENSIONS:

A	3.750" ±0.063
B	4.438" ±0.125
C	4.500" ±0.063
D	3.000" ±0.063
E	2.875" ±0.063
G	0.281X 0.564"

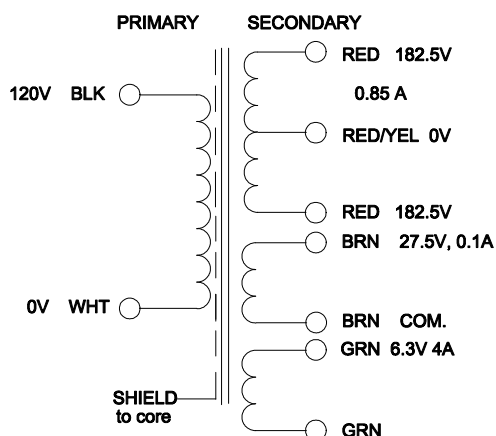

ELECTRICAL DATA:

Turns ratio:	1 : 3.18 (RED - RED)
Exciting Current	@ 120V, 60Hz, BLK - WHT = 600mA Max.
DCR	@ 20C, BLK - WHT = 0.661 Ω ±20%
	@ 20C, RED - RED = 4.98 Ω ±20%
	@ 20C, GRN - GRN = 0.048 Ω ±20%
	@ 20C, BRN - BRN = 0.695 Ω ±20%
Sec. Voltage (RMS)	365VCT @ 850mA , 6.3V @ 4 A, 27.5V@ 0.10A, 120V-Pri
No Load Voltage	381.6VCT/ 6.60V/28.2V



**HAMMOND
MANUFACTURING**

52 RANKIN PLACE,
WATERLOO, ONTARIO, N2L 3Z5.
PHONE (519) 886-6181
FAX # (519) 886-9540

TITLE

POWER TRANSFORMER

DR BY D.H.

0

05/16/17

PRELIMINARY.

DATE 05/16/17

NO

DATE

REVISION

DIM IN(X)MM()

290EAZ