


Rev.	Description	Date
A		02-2019

Product Specifications

Construction & Material :

Item		Specifications
Product		CMR/CL3R Direct Burial Sound Audio Cable
Conductor	Construction	16/4 Stranded(65/0.16BC)
	Material	Bare Copper
Insulation	Material	PVC
	Avg.thickness	0.25mm
	Diameter	2.10 ± 0.10 mm
	Color	Black, Red, Green, White
Shielding	Material	Paper Tape
Rip Cord	Material	Rip Cord
Jacket	Material	FR-PVC
	Avg.thickness	0.55 mm
	Diameter	6.50 ± 0.20 mm
	Color	Black
Marking	AUDIO CABLE 4 COND 16 AWG HI-STRAND OXYGEN FREE COPPER CMR/CL3R DIRECT BURIAL AUDIO CABLE SUN RES XXXXXX C(ETL)US ***FT	
Nominal Weight	28 IBS	

Cross Section

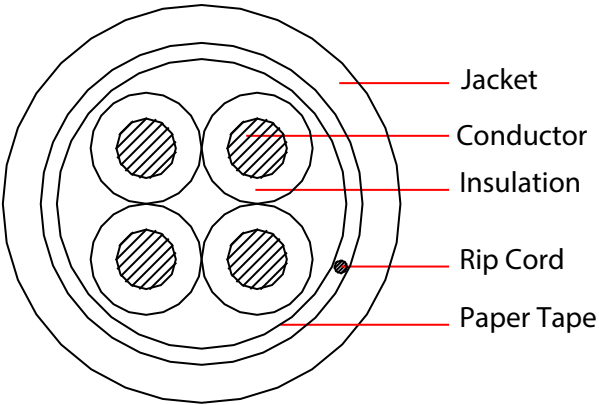

RoHS

Characteristics	
Conductor Resistance	15.8 ohms/1000m
Voltage	300V

Item Number:	10G2-722SF	
Title:	Outdoor/Direct Burial Speaker Cable, Black, Pure Copper, CMR/CL3R, 16/4 (16 AWG 4 Conductor), 65 Strand / 0.16mm, Pullbox, 500 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	125	

No.	Specifications
-----	----------------