


Rev.	Description	Date
A		05-2019

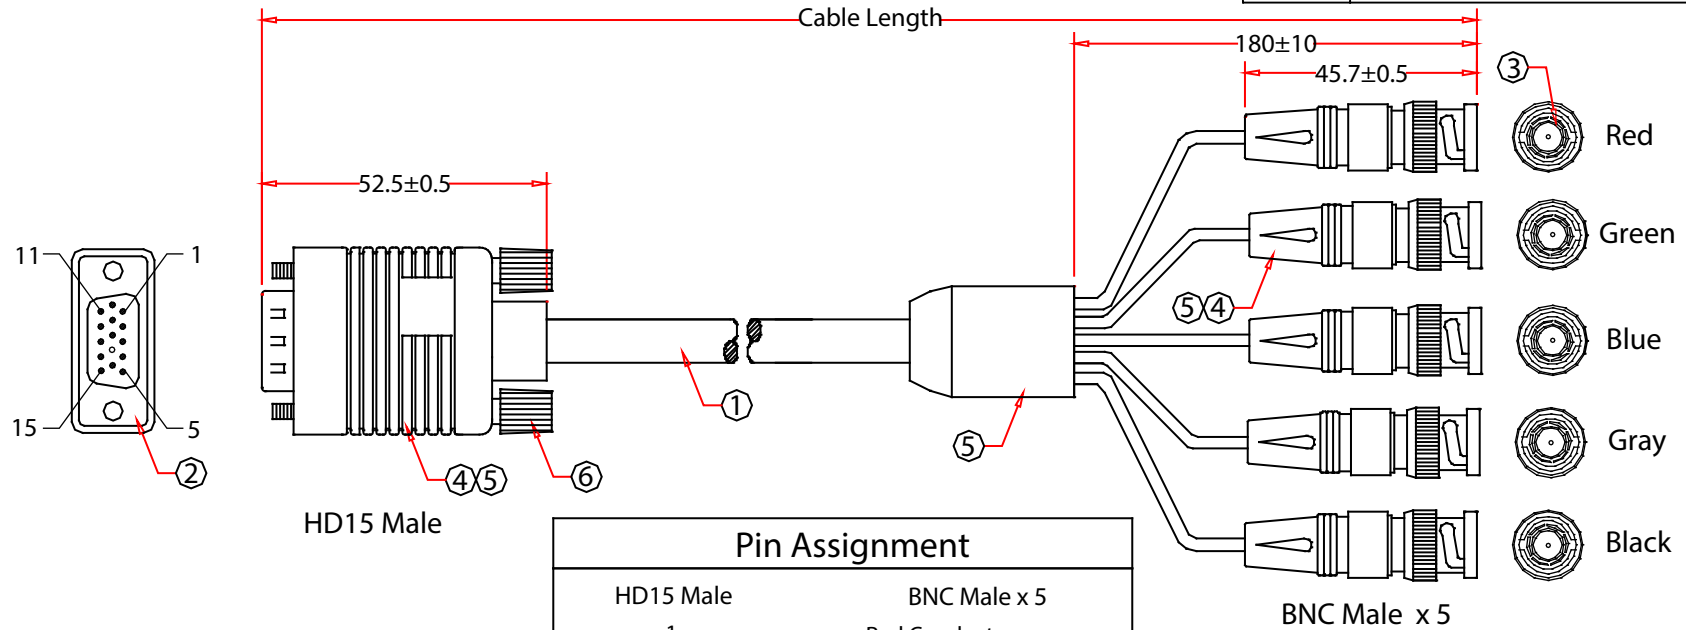

RoHS

Pin Assignment	
HD15 Male	BNC Male x 5
1	Red Conductor
6	Red Shield
2	Green Conductor
7	Green Shield
3	Blue Conductor
8	Blue Shield
13	Gray Conductor
11	Gray Shield
14	Black Conductor
10	Black Shield
4 + Shield	

PART NO.	CABLE LENGTH
10H1-18101BK	1 ft
10H1-18106BK	6 ft
10H1-18110BK	10 ft

6	Screw #4-40, Length 48mm, Black Molded PVC
5	Outer Molding PVC Black
4	Inner Molding PE, Color Transparent
3	BNC Male Connector, Gold Flash on Contacts, White Insulator (75 Ohm)
2	HD15 Male without Pin 9, Gold Flash on Contacts, Blue Insulator, Shell Nickel Plated
1	UL2919 5 Mini Coaxial 28AWG, Alum-Mylar Foil and Copper Braid Shielding with Drain Wire, OD9.0mm, Black Outer PVC Jacket
No.	Specifications

Item Number:	10H1-181xxBK	
Title:	SVGA (HD15 Male) to BNC (5 Male) Monitor Breakout Cable, Black, Double Shielded	
Drawn by:	JL	
Approved by:	MAC	
ID:	1	