


REV.	DESCRIPTION	DATE
A		04-2012

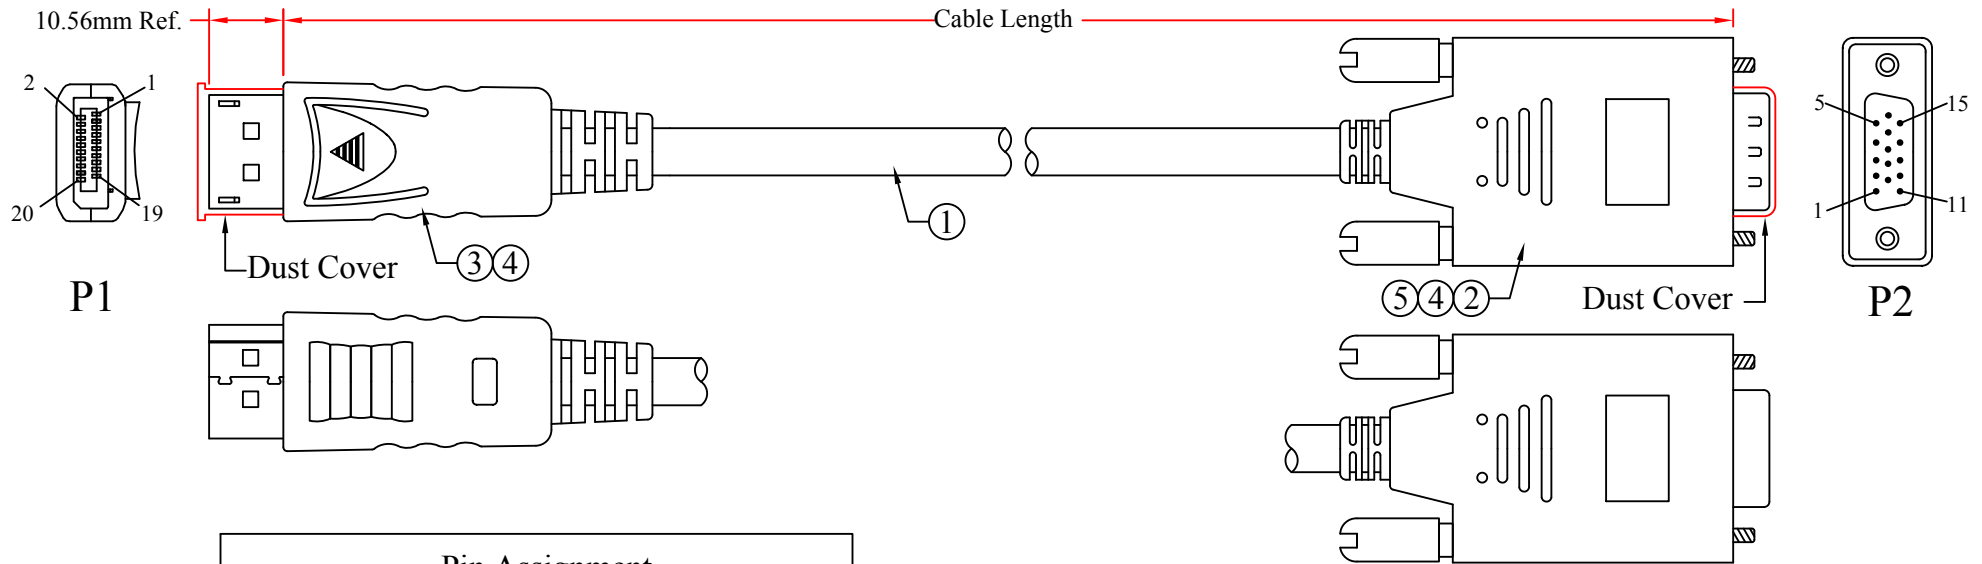

Pin Assignment			
P1	P2(PCB)	P1	P2(PCB)
1	1	13	13
3	3	14	14
2	2	18	18
4	4	19	19
6	6	20	20
5	5	Shell	Drain Braid Shell
15	15		
17	17		
16	16		

RoHS

PART NO.	CABLE LENGTH
10H1-65103	3 FT
10H1-65106	6 FT
10H1-65110	10 FT
10H1-65115	15 FT

5	Screw #4-40UNC
4	Black Molded PVC
3	Display Port Male, Isulation: Black, Material: LCP, Pin Gold Plated, Shell Gold Plated, With ABS Plastic Hood
2	DP to VGA Male, PCB+SMT, VGA Pin Gold Plated, Shell Gold Plated
1	UL20276 [28AWG(7/0.127TC)*1P+D.W+AL+Mylar]*3+28AWG(7/0.127TC)*5C+AL/MY+D.W+Braid, OD:6.0mm, Black PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	10H1-651xx		DRAWER	JL
TITLE	Display Port to VGA Male Cable		CHECKED	
MATERIAL	SCALE		APPROVED	
REV.	A	UNIT	INCH	
DRAWING NO:				