
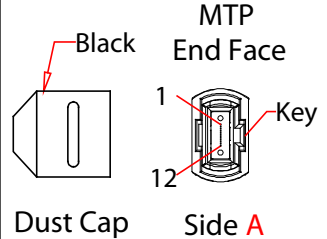


RoHS


Rev.	Description	Date
A		02-2023

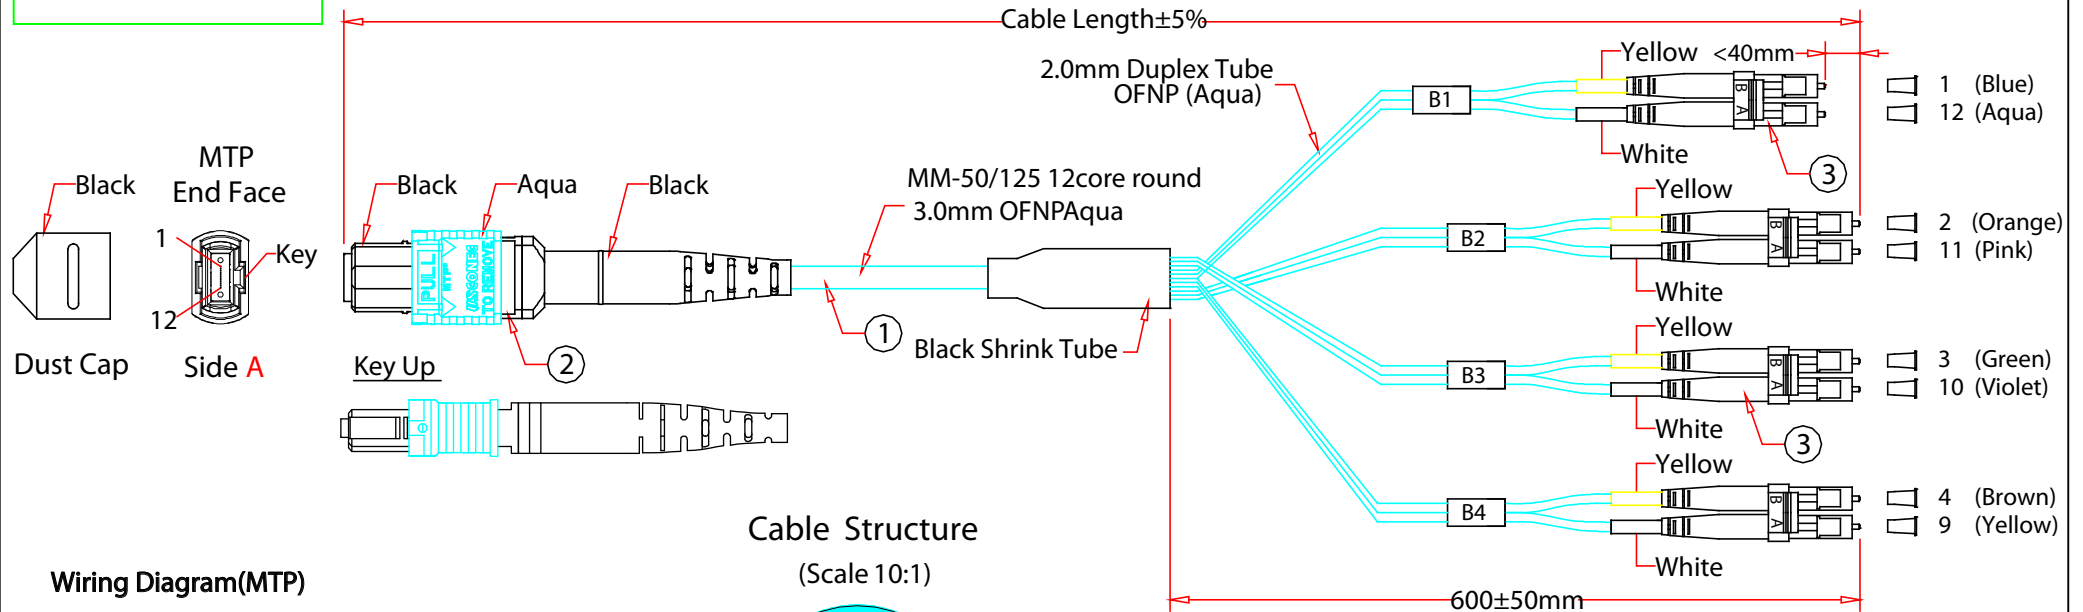

Wiring Diagram(MTP)

Side A	Fiber Color
1	Blue
2	Orange
3	Green
4	Brown
5	-----
6	-----
7	-----
8	-----
9	Yellow
10	Violet
11	Pink
12	Aqua

Not used
Not used
Not used
Not used

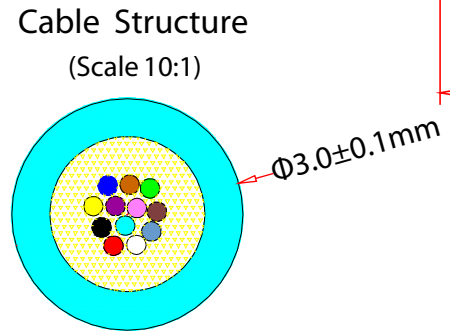

Notes:
 Insertion Loss:
 ≤0.5dB @850nm for each MTP+Cord Attenuation
 ≤0.3dB @850nm for each LC+Cord Attenuation
 Cord Attenuation:L(m)/1000(m)x3.5dB/1 km@850nm

PART NO.	CABLE LENGTH	PART NO.	CABLE LENGTH
MPLC-41001	1 Meter	MPLC-41010	10 Meter
MPLC-41002	2 Meter	MPLC-41015	15 Meter
MPLC-41003	3 Meter	MPLC-41030	30 Meter
MPLC-41005	5 Meter	MPLC-41050	50 Meter

No.	Specifications
3	LC duplex MM Connetor, 4PCS
2	MTP/PC Connector
1	MM-50/125 OM4 12 or 8 core round 3.0mm OFNP Aqua

Item Number:	MPLC-410xx		
Title:	Plenum Fiber Optic Cable, 40 Gigabit Ethernet QSFP 40GBase-SR4 to MTP(MPO)/LC (4 Duplex LC) 24 inch Breakout Cable, OM4, 50/125		
Drawn by:	JL		
Approved by:	MAC		
ID:	124		