## Pneumatic Torque Wrenches MODELS 10001-10024










## **Benefits & Features:**

- Hardended alloy steel for durability and long cycle life.
- Multiple stage planetary gear systems with optimized tooth design.
- Ultra-efficient air motor designed for easy maintence.
- One finger trigger control for forward and reverse.

The ESCO Professional Pneumatic Torque Wrenches are designed with precise accuracy through our surgical like gear production. Designed much like an impact wrench, once the trigger is pulled, the word "IMPACT" is the last thing that comes to mind. The ESCO Pneumatic Torque Wrench Series is a smooth running instrument that can apply a vast amount of torque in a continuous fluid manner; with torque accuracy of +/- 5%. Available in Torque Ranges from 78 ft/lbs. to 5,990 ft/lbs.

		ESCO		ESCO ESCO	
	. 77	. 7	, <u>, , , , , , , , , , , , , , , , , , </u>	Л.	7
Model	10002	10024	10001	10015	10017
Square Drive	3/4"	1"	1"	1"	1 1/2"
Min. Torque (Ft/Lbs)	130	300	460	1005	1525
Max. Torque (Ft/Lbs)	530	1030	2015	3070	5990
Min. Torque (Nm)	176	407	624	1362	2067
Max. Torque (Nm)	718	1396	2732	4162	8120
Dimension (A)	7.89" 200mm	7.89″ 200mm	7.89″ 200mm	8.06" 205mm	8.69" 221mm
Square Drive (B)	0.75″ 19mm	1" 25mm	1" 25mm	1" 25mm	1.5″ 38mm
Dimension (C)	6.80″ 173mm	8.87" 225mm	9.40" 238mm	10.62" 270mm	12.32" 313mm
Dimension (D)	2.56" 65mm	2.85" 72mm	3.09" 78mm	3.75" 95mm	5.00″ 127mm
Weight	9 lbs. 4.1kg	12 lbs. 5.5kg	16 lbs. 7.3kg	20 lbs. 9.1kg	36 lbs. 16.3kg
RPM @ 20 psi	26	11	6	3	2
Tool Max psi	80 psi	70 psi	90 psi	65 psi	90 psi
RPM @Max psi	44	15	9	4	3

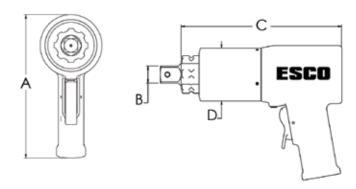

sales@esco.net WWW.ESCO.NET 1.800.352.9852











