

## WallGuard High Impact Corner Wall Padding

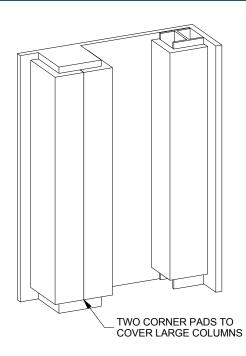

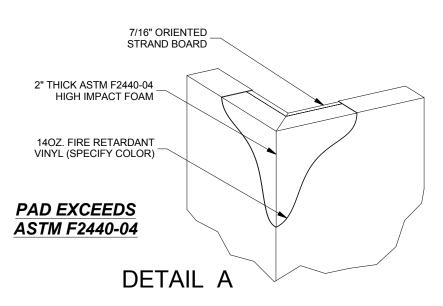

## **SPECIFICATIONS - HIGH IMPACT CORNER PADS**

D/N

Jaypro Sports High Impact Corner Pads are for indoor use only. Vinyl meets or exceeds the requirements of NFPA 101 Life Safety Code for Class A rating (Flame Spread 0-25, Smoke Development 0-450) and Califorina State (CSFM) test requirements. <a href="Pad meets or exceeds impact standards">Pad meets or exceeds impact standards as defined in ASTM F2440-04</a>.


Construction: Pad shall have 2" thick ASTM F2440-04 high impact foam with 7/16" oriented strand board (OSB) backing. Vinyl shall be wrapped around backside of backer board and secured with steel staples. Vinyl shall be 14 oz per square yard with grab tensile strength 365lbs x 348lbs and tongue tear strength 92lbs x 83lbs. Vinyl shall be washable and resistant to fade, rot, mildew, and fungus.

Attachment: Corner pads available with z-clip top and bottom, z-clip top and 1" margin bottom, or 1" margin top and bottom. Corner pads can be mounted to wood, drywall, concrete, brick, etc using the appropriate fasteners supplied by others (not Jaypro).

Custom corner pad sizes are available. See additional specification for flat wall pads, straight column pads, and tapered column pads. Vinyl available in 14 standard colors.

DESCRIPTION

QUANTITY		P/N	DESC	RIPTION	
	JWCL-I	ZZ	Z-CLIP TO	OP & BOTTOM	
	JWCL-I	Z	Z-CLIP TO	OP, 1" LIP BOTTOM	
	JWCL-I		1" LIP TO	P & BOTTOM	
				SPECIFY COL	∟OR
PROJECT NAME				ROYAL BLUE	☐ PURPLE
PROJECT NUMB	ED			NAVY BLUE	RED
PROJECT NOWB	EK			LIGHT BLUE	MAROON
ARCHITECT				FOREST GREEN	ORANGE
				☐ KELLY GREEN	YELLOW
CONTRACTOR				BLACK	☐TAN
NOTEO				WHITE	GRAY
NOTES					





OLIANTITY



www.jaypro.com (800) 243-0533 976 Hartford Turnpike Waterford, CT 06385 USA

Sheet 1 of 1