


# Wall Mount, Hughes Drench Shower, Stainless Steel Pipe - 23GSH

## Product Images

---

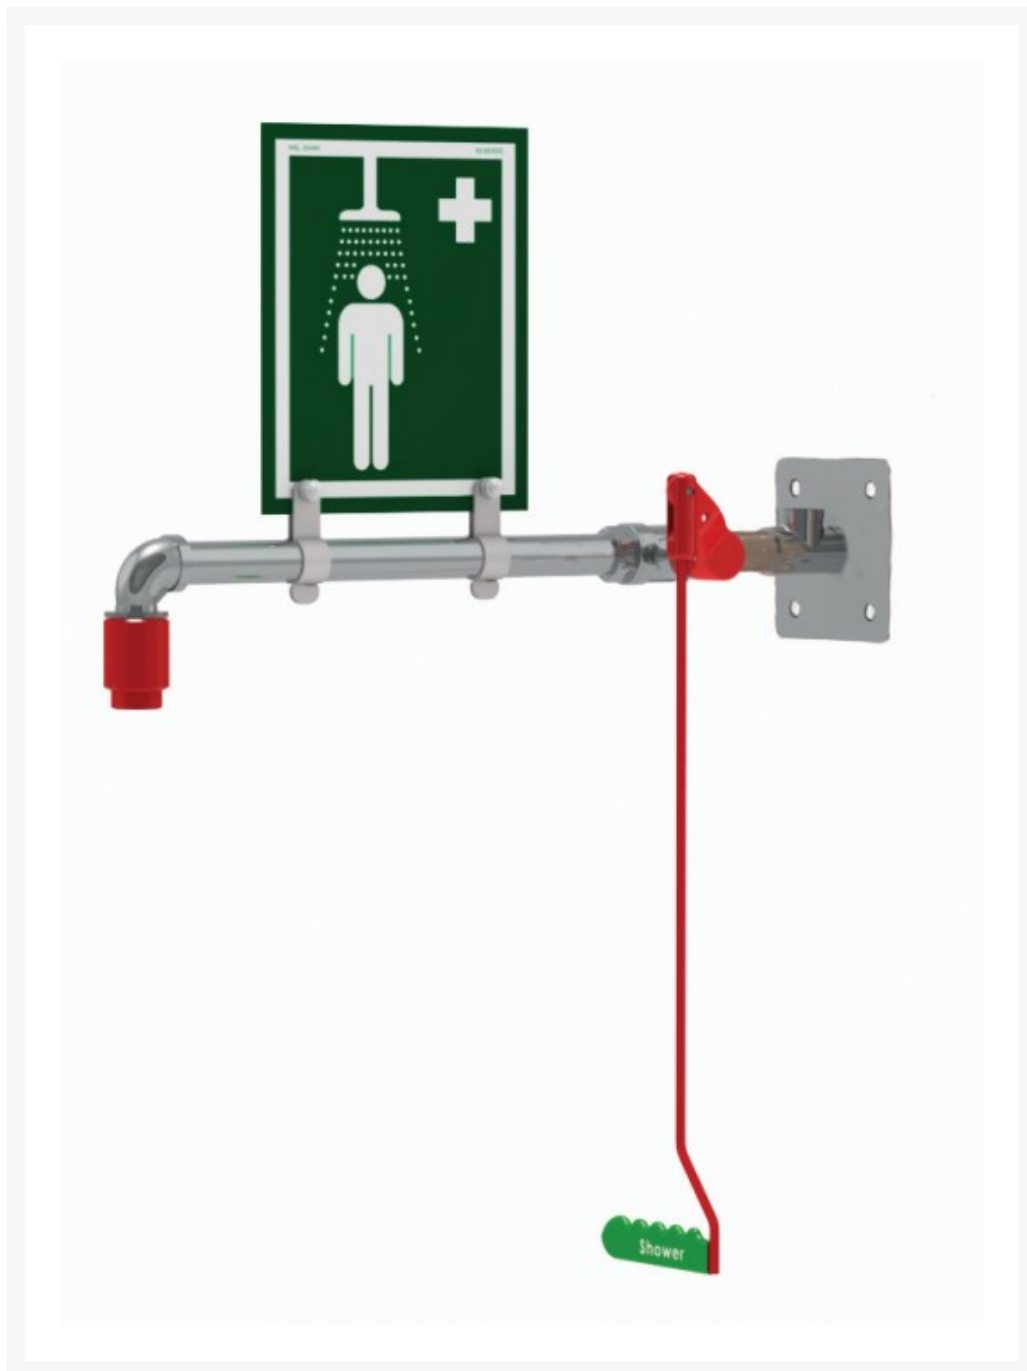

## Short Description

---

# HUGHES



Justrite Safety Group

- Removable, self-draining nozzle constructed from durable nylon
- High-performance quarter-turn ball valves made of 316L stainless steel endure the harshest environments and site conditions
- Includes a universal safety shower sign for enhanced visibility
- Meets ANSI Z358.1 2014 and EN 15154 standards, supports OSHA requirements

## Description

---

Ideal in factories, schools, laboratories or other indoor environments where space is at a premium, use this wall mounted shower for treatment of full-body chemical exposure. Suitable for use in all applications that do not require an eye wash and are not subject to the possibility of freezing or overheating.

The system features a specially designed valve that includes an integral, heavy-duty stainless steel stop-plate to handle rough operation without failure. Low operating torque offers reliable, easy on/off operation. Durable, coated stainless steel pull handle with nylon valve connection is easy to grip and activate for immediate water drenching.

Designed for high flow rates that meet or exceed ANSI standards, the nozzle offers optimal spray distribution for user protection. Unlike shower rose designs, this compact nozzle reduces the potential for insect nesting and eliminates high replacement costs associated with cracked or dented plastic spray heads.

Solid construction using stainless steel pipework for added corrosion resistance. Includes an inspection record tag for recording service and test history. Some assembly may be required.

## Specifications

---

Model No	23GSH
UPC	805042000205
Net Weight, lbs	11
Net Weight, kg	5
Dimensions, Exterior	35.8" H x 8.5" W x 28.7" D
	909mm H x 215mm W x 215mm D
Height Without Sign, inches	25.3
Height Without Sign, mm	642
UL Classified to ANSI Z358.1-2014	Yes
Water Inlet Size NPT	1 in (F)
Minimum Operating Pressure	1.5 bar g, 22 PSI
Maximum Operating Pressure	6 bar g, 87 PSI
Water Flow Shower/Body Liters/min	76
Water Flow Shower/Body US Gal/min	20
Material Specifications	Nozzle: Nylon 6
Operating Valve Material	316L Stainless
Mounting Type	Wall
Pipework Material	Stainless Steel
Activation Method	Pull Handle
Minimum Ambient Temperature, °F	41
Minimum Ambient Temperature, °C	5
Maximum Ambient Temperature, °F	95
Maximum Ambient Temperature, °C	35