

PowerLuber fully automatic pneumatic grease gun

Model 1162

The variable speed trigger provides excellent grease flow control while the advanced pump design eliminates traditional priming issues

- Outstanding durability and dependability
- Fully automatic, continuous operation
- Variable-speed trigger
- Accessible check valve assembly
- Comfortable grip
- 30 in. (762 mm) high-pressure hose with coupler and attachment clip (model 1230)
- Includes a combination filler nipple and bleeder valve
- Superior flow performance obtained through advanced design
- Standard grease cartridge



Model 1162 PowerLuber technical data

Pump ratio	40:1 at 150 psi (10 bar)
Maximum grease pressure	6 000 psi (414 bar)
Air pressure range	40 to 150 psi (2.8 to 10.3 bar)
Lube capacity	16 oz. (454 cm ³) bulk/14.5 oz. (411 cm ³) cartridge
Weight	5.375 lbs. (2,4 kg)



Hoses for grease guns and air-operated control valves

Premium extensions for grease guns and air-operated control valves


Model	Description		Thread size	Maximum pressure	
	in.	mm	NPT (m)	Working	
–	in.	mm	in.	psi	bar
5812	12	305	1/8	4 500	310
5818	18	457	1/8	4 500	310
5861	36	914	1/8	4 500	310



Strategically placed coil spring provides nonslip, push-pull grip and prevents accidental kinking which could cause hose ruptures.

Hose extensions for manually operated grease guns, packaged

Model	Description		Thread size		Maximum pressure		Burst pressure	
	in.	mm	inlet NPT (m)	outlet NPT (m)	Working		psi	bar
–	in.	mm	in.	in.	psi	bar	psi	bar
71512	12	305	1/8	1/8	3 000	207	12 000	827
71518	18	457	1/8	1/8	3 000	207	12 000	827
G212	12	305	1/8	1/8	3 500	241	14 000	965
G212S*	12	305	1/8	1/8	3 500	241	14 000	965
G218	18	457	1/8	1/8	3 500	241	14 000	965
G218S*	18	457	1/8	1/8	3 500	241	14 000	965

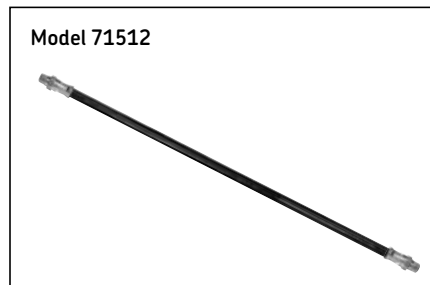

* With spring guard

Extensions for manually operated grease guns, bulk (unpackaged)


Model	Description		Thread size	Maximum pressure		Burst pressure	
	in.	mm	NPT (m)	Working		psi	bar
–	in.	mm	in.	psi	bar	psi	bar
75912CL	12	305	1/8	3 000	207	12 000	827
75918CL	18	457	1/8	3 000	207	12 000	827
75924CL	24	610	1/8	3 000	207	12 000	827
75936CL	36	914	1/8	3 000	207	12 000	827



Whip hose extensions for PowerLubers

PowerLuber whip hoses

Model	Description		Thread size		Maximum pressure	
	in.	mm	inlet UNEF	outlet NPT (m)	Working	
–	in.	mm	in.	in.	psi	bar
1218	18	457	7/16	1/8	7 500	517
1224	24	610	7/16	1/8	7 500	517
1230	30	762	7/16	1/8	7 500	517
1236	36	914	7/16	1/8	10 000	689
1248HP	48	122	7/16	1/8	10 000	689

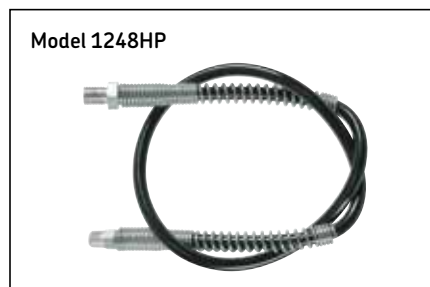

Model 1230
These hoses only fit Lincoln battery-operated PowerLuber grease guns and model 1162 air-operated grease guns.