


# ROLLS

## DA134 DISTRIBUTION AMPLIFIER

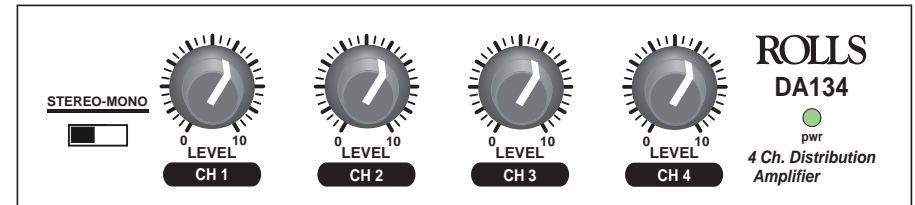

### FEATURES

- Expands the output of a stereo device to multiple outputs
- Can raise the output level to true line level for any output
- Stereo 4 channel distribution amplifier
- Front panel volume controls
- Mono or Stereo operation
- DC low end frequency for audiophile frequency response
- Small compact design
- Accepts inputs directly from I-pad / I- pod or laptop / notebook

### SPECIFICATIONS

Input Impedance:	10 K $\Omega$
Max Input Level:	+12 dBV
Output Impedance:	470 $\Omega$
Max Output Level:	+12 dB
Max Gain:	20 dB
S/N Ratio:	>90 dB
Cross Talk:	-70 dB (stereo)
Frequency Response:	DC - 60 kHz, +/- 1 dB
THD:	<.008%
Power:	15 VDC
Size:	6.5" x 3.5" x 1.5"
Weight:	1 lbs. 3 oz.

# ROLLS

ROLLS CORPORATION  
SALT LAKE CITY, UTAH


04/12

Quick Start Operation Guide

## INTRODUCTION

Thank you for your purchase of the ROLLS DA134 Distribution Amplifier. This unit will distribute a mono signal to eight outputs, or a stereo signal to four right and four left outputs. The outputs are designed to drive line level signals.

NOTE: THIS MANUAL ASSUMES THE USER HAS A BASIC WORKING KNOWLEDGE OF AUDIO ELECTRONICS, BALANCED AND UNBALANCED CONNECTIONS, AND PROPER SIGNAL LEVEL SETTING.

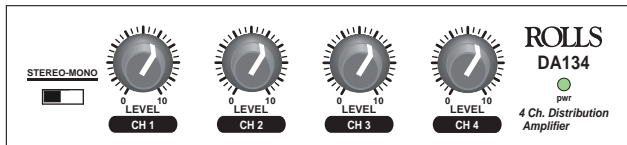


FRONT PANEL

Channel Level Controls: These volume controls vary the level of signal for each indicated output.

pwr: LED indicating the unit's power status.

## STEREO/MONO CONFIGURATION

Use the Stereo - Mono switch to change the stereo/mono configuration of the DA134. Follow the silk screening on the unit for proper connection.

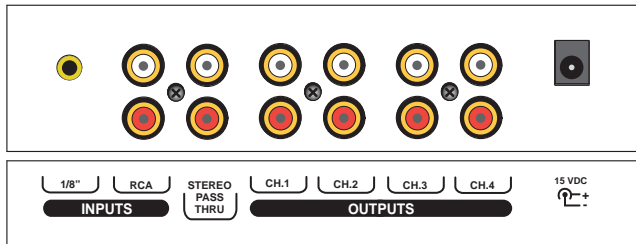

REAR PANEL

DC Jack for connection to the included Rolls PS27s power supply.

INPUTS Right and Left: RCA jacks.

Stereo pass thru: For connection to another DA134 (for linking them together). This could also be used as another input if needed (assuming your input devices are compatible). It is directly connected to the main Stereo Input RCA's

Outputs 1 - 4: RCA output jacks.

## INSTALLATION:

Install the DA134 hook up all input and output connections. The unit is intended for installations where several zones or areas need to be controlled. The DA134 is compatible with the Rolls RMS270 rack tray system. Two DA134's can be professionally mounted in the RMS270 rack tray.

## Disclaimer:

Training and operation is the dealers responsibility. At Rolls we do not sell directly to customers we have factory authorized dealers and it is the dealers responsibility to gather your equipment list and recommend proper products to the consumer. Do not call the Rolls factory and expect help with your setup we rely on our dealers to do such work. There is only so much that can be done over the phone so PLEASE CONTACT YOUR LOCAL DEALER WITH QUESTIONS. If you have purchased you item online or used, you are on your own. WE HIGHLY RECOMMEND THAT IF YOU ARE NOT FAMILIAR WITH SUCH PRODUCTS TO PLEASE BUY THEM FROM A REPUTABLE FACTORY AUTHORIZED DEALER THAT OFFERS CUSTOMER SUPPORT..

## SCHEMATIC

